

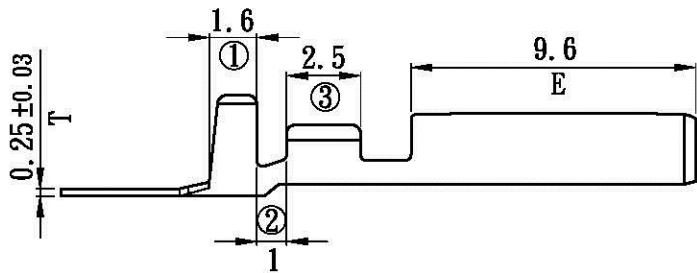

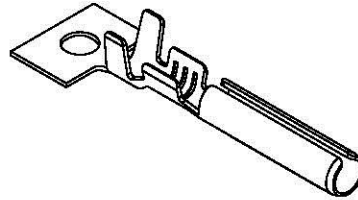


產品成品圖

Terminal

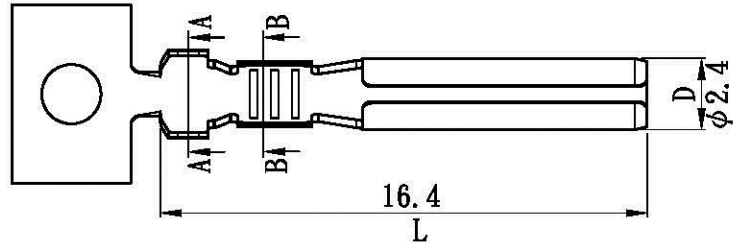

表面處理(Surface treatment):
預鍍錫膜厚40 μ"以上
(Pre-tin-plated thickness
more than 40 μ")

適用電線(Applicable wire):
AWG# 20~22

線皮外徑(Insulation O.D):
1.9-1.7 mm

包裝數量(Standard packing):
8000 PCS

此產品須符合RoHS指令要求
(The product must conform to
the RoHS directive)

Allconnectors

www.allconnectors.de
Tel: 0049 711 7025903
All/44 Hildesheim, Germany

info@allconnectors.de
Fax: 0049 711 7025904
Kollmannstr. 25

UL NO:		CSA NO:		TUV NO:		名稱(Name): 產品規格(Product specifications)			核發單位 (Issued by)	制定單位 (Instituted by)
						編號(Part No.): A00242BS-2				
						材質(Material): 黃銅[Brass]				
						核 准 (Approved by)	審 查 (Confirmed by)	制 定 (Drawn by)	單位(Unit):mm	比例(Scale):Free
				1	6-Jul-08	韓曜安	韓曜安	陳敏伶	第三角法 (Projection): 	一般公差 (General tolerance): ±0.3
記號 (Sign)	變更內容 (Change description)			版次 (Edition)	制修訂日期 (Drawn date)					