


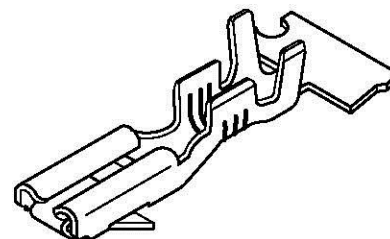


產品成品圖

Terminal(110 Type)

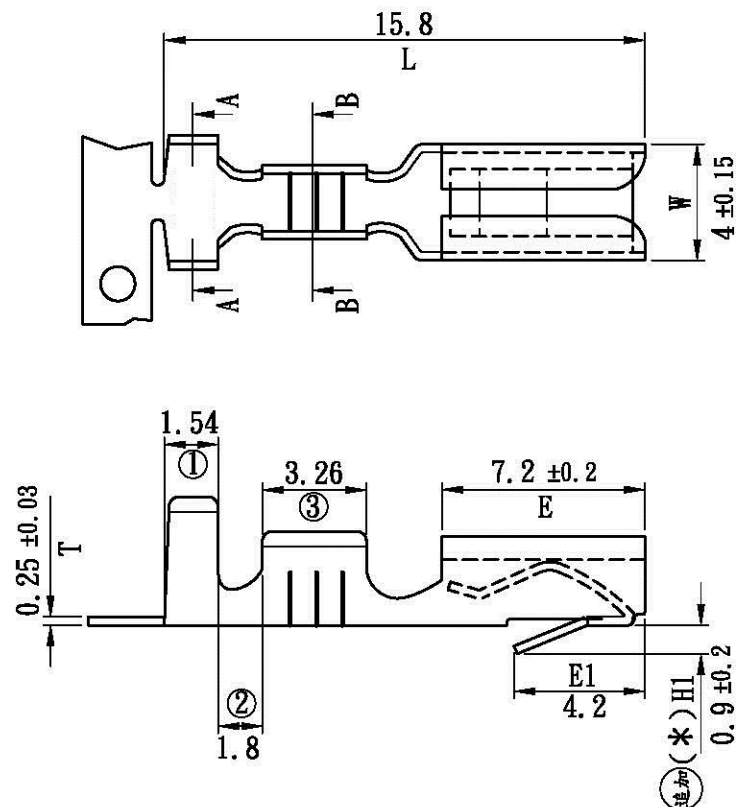

B-B Section



A-A Section

鍍錫編號[Part No.(Tin-plated before press/forming)]:D70308BS-2

表面處理(Surface treatment):
預鍍錫膜厚40 μ"以上
(Pre-tin-plated thickness more than 40 μ")

適用電線(Applicable wire):
AWG# 16-22

線皮外徑(Insulation O.D):
2.5~1.7 mm

配合端子(Mates with terminal):
D60301BS, D60302BS

配合塑膠(Mates with housing):
NPK#-D70308

包裝數量(Standard packing):
4000 PCS

此產品須符合RoHS指令要求
(The product must conform to the RoHS directive)

Allconnectors

www.allconnectors.de
Tel.: 0049 781 7007507
20281 Filbertal - Germany

info@allconnectors.de
Fax: 0049 781 7007508
Kallmanns. 11, 25

UL NO:		CSA NO:		TUV NO:		名稱(Name): 產品規格(Product specifications)			核發單位 (Issued by)	制定單位 (Instituted by)
						編號(Part No.): D70308BS			<div>部品部 2009.02.25 核發</div>	<div>開發課 2009.02.25 制定</div>
						材質(Material): 黃銅[Brass]				
<div>⑤</div>	H1增加CC&SC標示*			6	25-Feb-09	核 准 (Approved by)	審 查 (Confirmed by)	制 定 (Drawn by)	單位(Unit):mm	比例(Scale):Free
<div>④</div>	圖面格式更新			5	17-Jun-08					
				1	15-Jun-92	韓曜安	韓曜安	陳敏伶	第三角法 (Projection): 	一般公差 (General tolerance): ±0.3
記 號 (Sign)	變 更 內 容 (Change description)			版次 (Edition)	制修訂日期 (Drawn date)					