

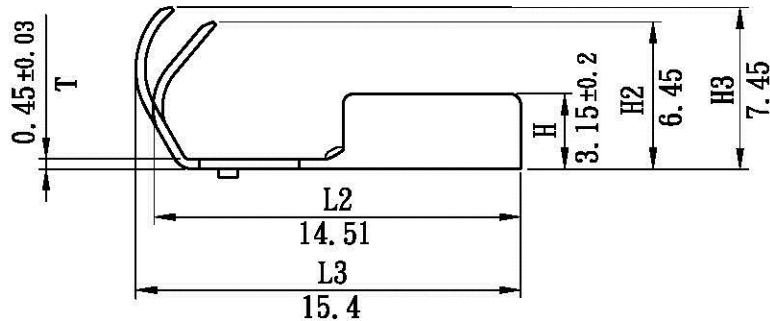
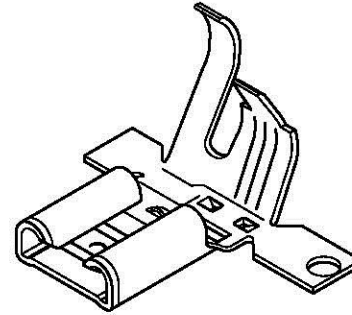


產品成品圖

Terminal(250 Flag Type)

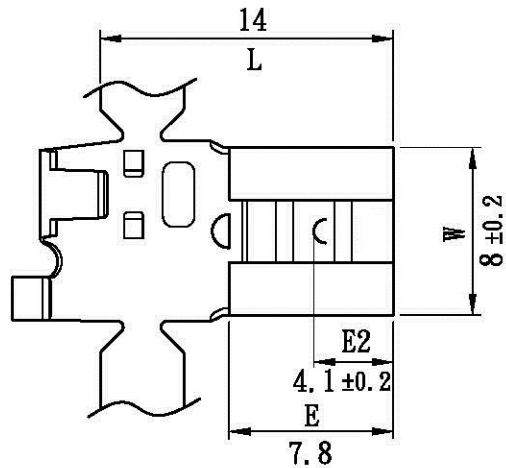

預鍍錫編號[Part No. (Tin-plated before press/forming)]:K70606BS-2S

表面處理(Surface treatment):
預鍍錫膜厚 40μ "以上
(Pre-tin-plated thickness more than 40μ ")

適用電線(Applicable wire):
AWG# 20~22

線皮外徑(Insulation O.D):
2.7~2.45 mm

配合端子(Mates with terminal):
D60603BL-2

包裝數量(Standard packing):
1700 PCS

此產品須符合RoHS指令要求
(The product must conform to the RoHS directive)

All Connectors

www.allconnectors.com
Tel.: 0049 711 2096918
70694 Hildesheim, Germany

info@allconnectors.com
Fax: 0049 711 2096914
Sales@allconnectors.com

UL NO:		CSA NO:		TUV NO:		名稱(Name): 產品規格(Product specifications)			核發單位 (Issued by)	制定單位 (Instituted by)
						編號(Part No.): K70606BS-S				
						材質(Material): 黃銅[Brass]				
						核 准 (Approved by)	審 查 (Confirmed by)	制 定 (Drawn by)	單位(Unit):mm	比例(Scale):Free
				1	7-Apr-08					
記號 (Sign)	變更內容 (Change description)			版次 (Edition)	制修訂日期 (Drawn date)	韓曜安	韓曜安	黃莉雯	第三角法 (Projection): 	一般公差 (General tolerance): ± 0.3