

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.

Insulator Resistance: 1000MΩ min. at DC 500V.




Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .


***RoHS Compliant**

HF-D-xxx-LF
LEADFREE

RoHS Compliant

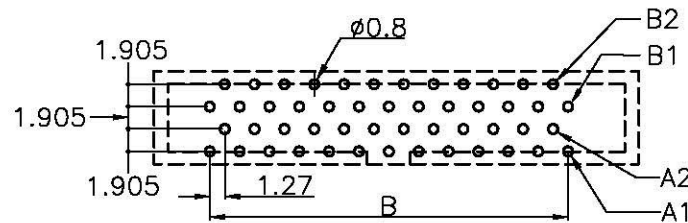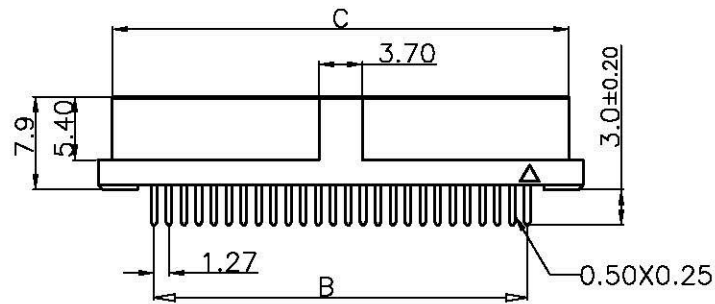

P.C. Board Layout Top View
(Tolerance:±0.05)
(26,34,50 Position)

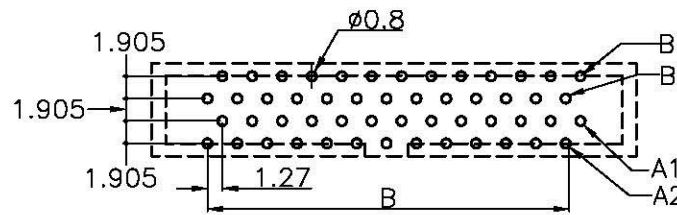

P.C. Board Layout Top View
(Tolerance:±0.05)
(20,32,40,52,60,68,80,100 Position)

Dimension	20 Thru 100
Position	20 Thru 100
A	1.27xNo.of Positions/2+8.25
B	1.27xNo.of Positions/2-1.27
C	1.27xNo.of Positions/2+5.85

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

PART NO. HF-D-xxx

DWG NO. HF-D-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE