

1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

**FEATURES:**





- Half pitch 1.27mm(.050") series
- Centronic male connector I.D.C type for cable
- Assembly hood: plastic(steel inner shell)
- Fully EMI/RFI shielded

**MATERIALS:**




- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Shell: Steel nickel plated over copper

**ELECTRICAL:**



- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 36mΩ Max
- Temperature Range: -55°C ~ +105°C

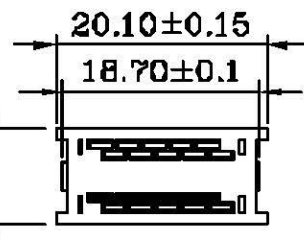

Termination Cover  
(1 Places)

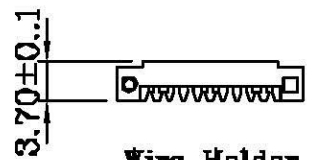

Wire Holder  
(2 Places)

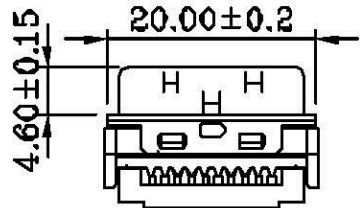

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009903  
70754 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009904  
Kettenerstr. 25

PART NO. HPC-PF-020

DWG NO. HPC-PF-020

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X±  
.XX±  
.XXX±  
AWG

DESCRIPTION:

AREA

**1.27mm(.050") Pitch Centronic 20P  
Male Connector I.D.C  
Assembly Type**

REVISIONS

HK

DATE