- MATERIALS:(RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated Over Copper

- ELECTRICAL CHARACTERISTICS:

Contact Currect Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

HPC-PSMBK-036-LF
LEADFREE
RoHS Compliant

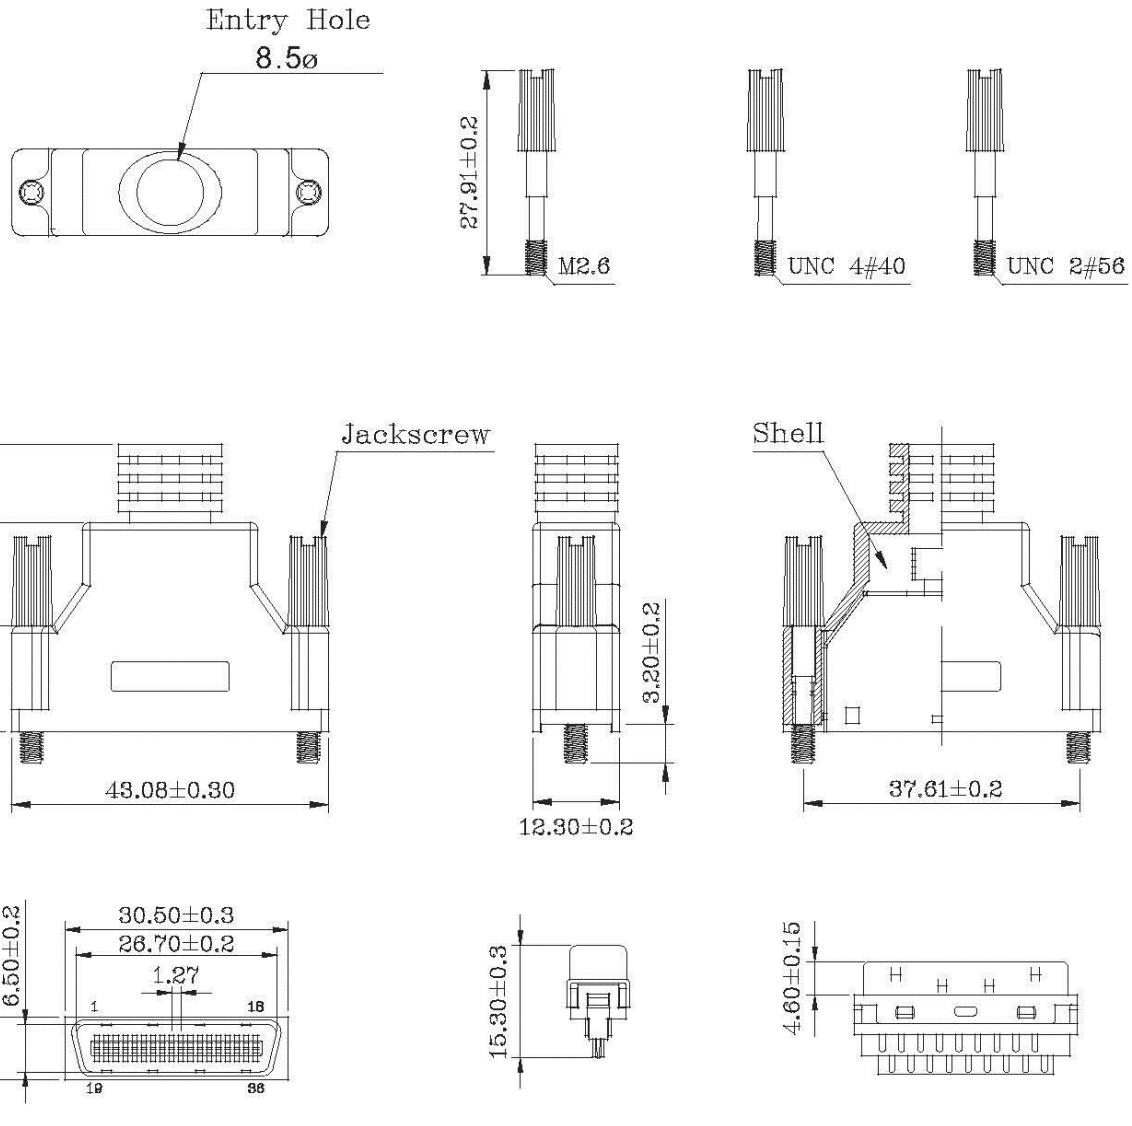

All Connectors
www.allconnectors.de
Tel.: 0049 711 7008503
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7008504
Kettemerstr. 25

PART NO. HPC-PSMBK-036							
DWG NO. HPC-PSMBK-036	CHECKED BY CY	TOLERANCES ARE	DESCRIP TION:	1.27mm(.050") Series 36Pos Plastic Hood With Jackscrews			
FILE NO.	DRAWING BY	.X ± 0.2 .XX ± .XXX ± AWG					
UNIT / mm SCALE 1:1	PROJECTION		AREA	REVISIONS	HK	DATE	