



PIN	A	B	C	D
20	24.15	16.93	11.43	21.43
40	36.85	29.63	24.13	34.13
50	43.20	35.98	30.48	40.48
68	54.63	47.41	41.91	51.91
80	62.25	55.03	49.53	59.53

2 Rows Type

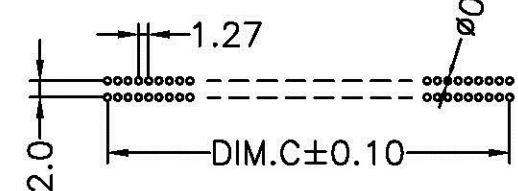

4 Rows Type

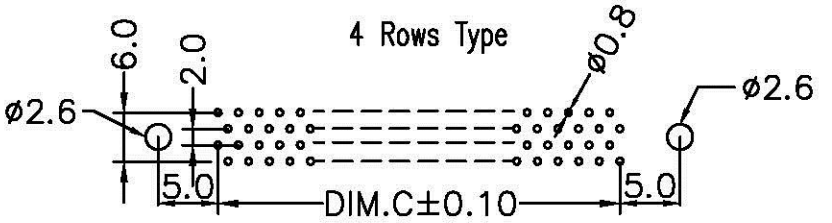

P. C. B. LAYOUT

MATERIAL :
 INSULATOR : PBT+30% GLASS FIBER (UL94V-0)
 CONTACT : PHOSPHOR BRONZE OR BRASS
 CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :
 CURRENT RATING : 1AMP.
 WITHSTANDING VOLTAGE : AC 500V R.M.S
 INSULATION RESISTANCE : 1000MEGOHMS MINIMUM
 AT DC 500V.
 CONTACT RESISTANCE : 15 MILLMIOHMS MAXIMUM.
 OPERATING TEMPERATURE ; -40°C~105°C.

All Connectors
 www.allconnectors.de
 info@allconnectors.de
 Tel: 0049 / 11 4005005
 Fax: 0049 / 11 4005001
 00794 Hilferstadt - Germany
 Kettnerstr. 22

PART NO. HPCP-SDZ-080

DWG NO. HPCP-SDZ-080

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1

PROJECTION

TOLERANCES ARE
 .X ± 0.1
 .XX ± 0.05
 .XXX ±
 AWG

DESCRIPTION:					
AREA	REVISIONS	HK	DATE		