


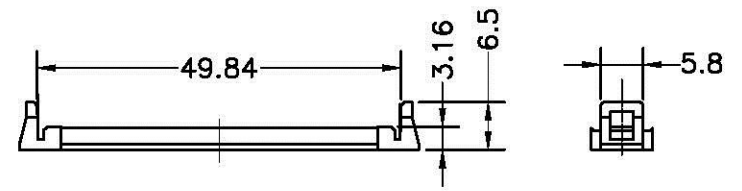

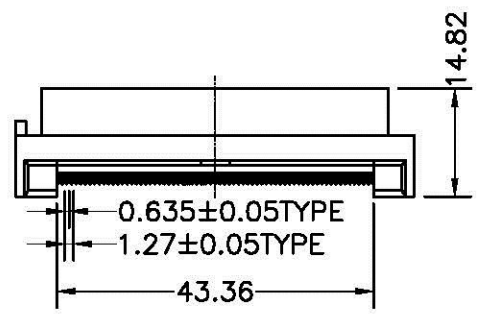
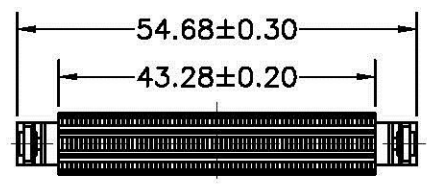


MATERIAL:

- 1.HOUSING: PBT+30 %G.F.(UL 94V-0)
- 2.TERMINAL: Phosphor Bronze,C5191R-H T=0.300.01mm
- 3.TETMINAL PLATED: GOLD FLASH ON CONTACT ;
100u' MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING:0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC
R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:1000M OHMS MIN.
- 4.CONTACT RESISTANCE :30m OHMS MAX.
- 5.OPERATING TEMPERATURE :-20°C TO +85 °C.

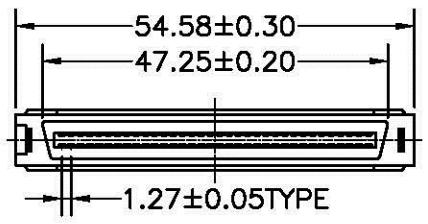

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7005503 Fax: 0049 711 709504
Allerstraße 25

PART NO. HPCP-SF-068

DWG NO. HPCP-SF-068

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
.X ± 0.20
.XX ± 0.15
.XXX ±
AWG

DESCRIP TION:

AREA

SCA (F)68P 刺破式(ASS'Y)
CUSTOMER

REVISIONS

HK

DATE