

• MATERIALS:(RoHS Compliant)












Hood: Plastic Thermoplastic ABS UL 94V-0
 Jackscrews: Steel Nickel Plated Over Copper
 Jackscrews Hood: PVC
 Inner Shell: Steel Nickel Plated Over Copper

• MATERIALS:(RoHS Compliant)

Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated
 Front Shell: Steel Nickel Plated
 Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +105°C

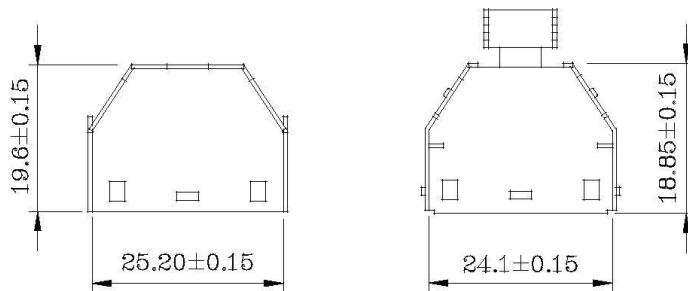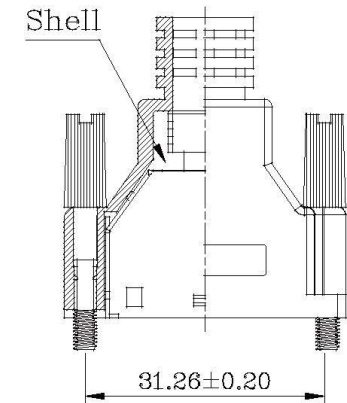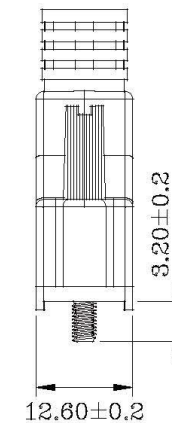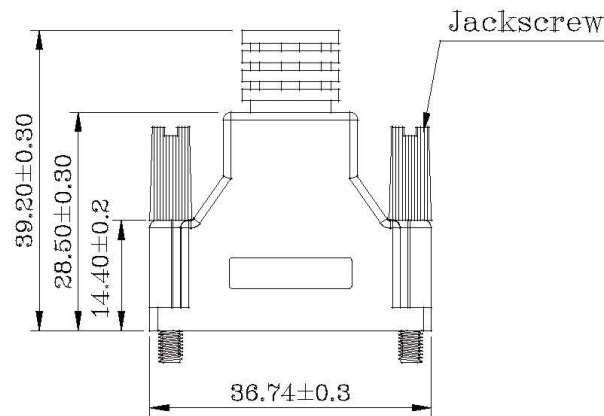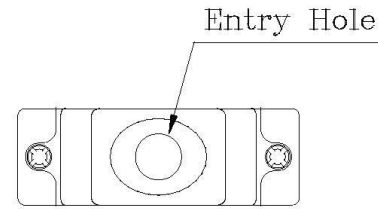

All Connectors
 www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant		TOLERANCES ARE	
DRAWING BY CY		X ±	
CHECKED BY GENIUS		.X ±	
UNIT/mm	SCALE 1:1	.XX ±	
DATE		.XXX ±	
SIZE A4	PJECTION	ANG ±	



ORDER INFORMATION
HPD-PSMBK-026-LF
 SERIES | 26 WAY | LEADFREE
 BLACK COVER
 SOLDER
 MALE

DESCRIPTION: