


• **MATERIALS:(RoHS Compliant)**

- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Bracket: Steel Nickel Plated
Over Copper
- Screw Net: Copper Alloy

• **ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +105°C

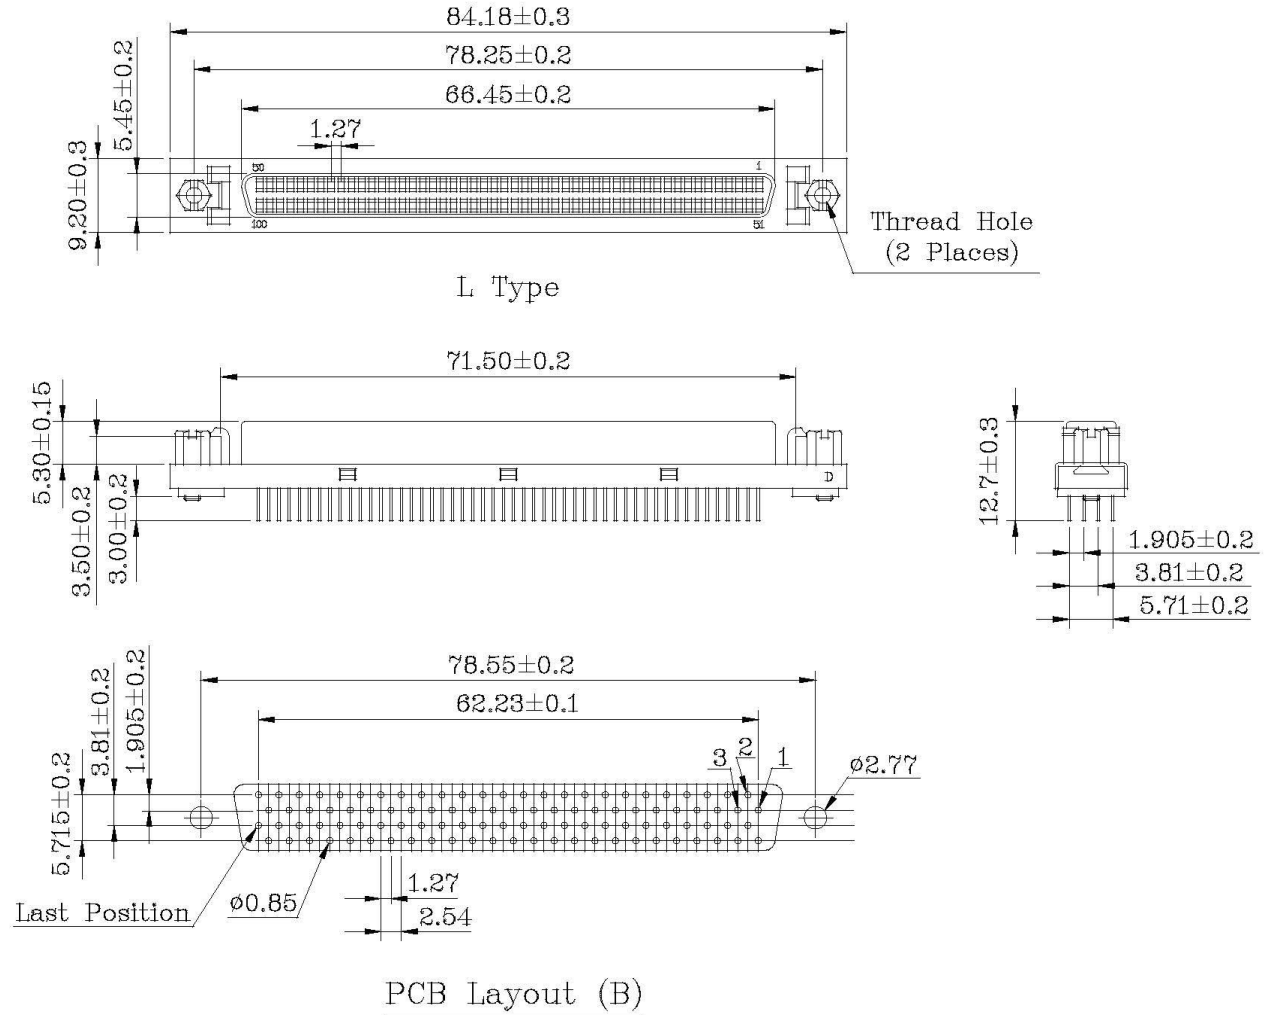

		RoHS Compliant		TOLERANCES ARE	
		DRAWING BY CY		X ±	
CHECKED BY GENIUS				.X ±	
UNIT/mm	SCALE 1:1			.XX ±	
DATE				.XXX ±	
SIZE A4	PJECTION			ANG ± 1°	



ORDER INFORMATION			
HPD-SDLJ-100-LF			
SERIES	JACKSCRW LOCK DIP 180° FEMALE	LEADFREE 100 WAY	
DESCRIPTION: 1.27mm (.050") Pin Type 100Pos Receptacles Headers Vertical Mount Type			

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25