


• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
 P.B.T UL94V-0 black
 Contacts : Phosphor bronze gold
 selective plated
 Bracket : Die-Cast Zinc NICKEL
 plates over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ Max
 Operation Temperature: -55°C ~ +105°C

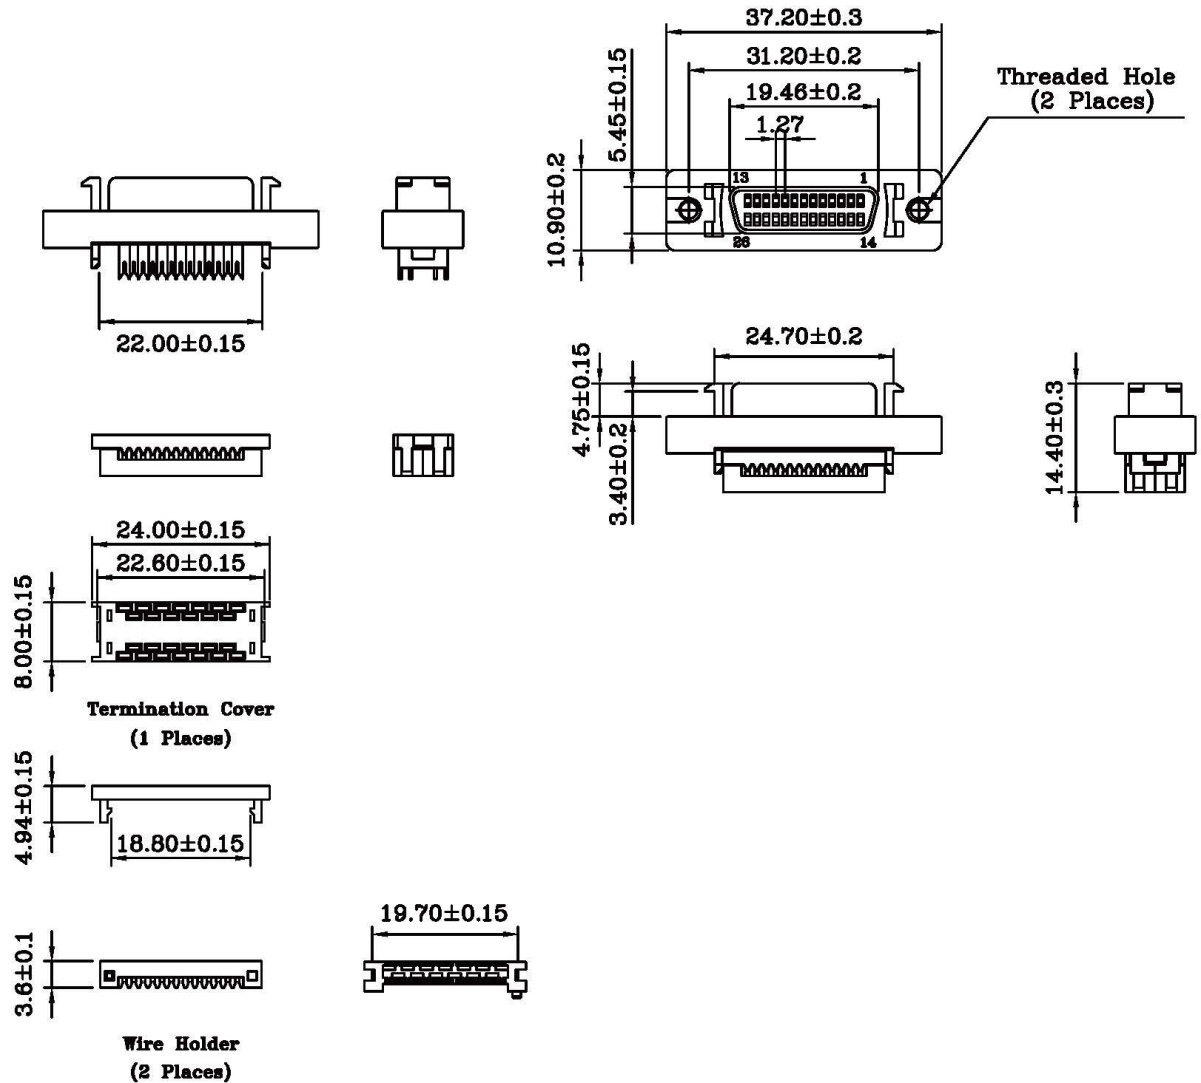

All Connectors


www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/ mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

X ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±



ORDER INFORMATION

HPD-SFL-026-LF
 SERIES | LEADFREE
 | 26 WAY
 | LOCK
 | IDC
 | FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 26Pos
 Cable Receptacles Connector I.D.C Type