

FEATURES:




- Half pitch 1.27mm(.050") series
- D-SUB female connector for 0.635mm(.025") pitch flat cable
- Panel mount receptacle assemblies bracket with latch block and without latch block
- Die-Cast body provided EMI/RFI shielded

MATERIALS:


- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Bracketshell: Die-Cast zinc nickel plated over copper

ELECTRICAL:


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

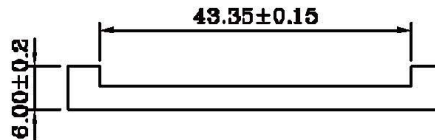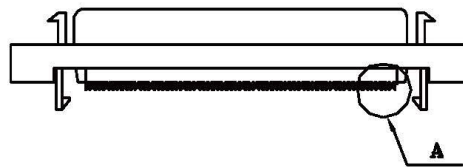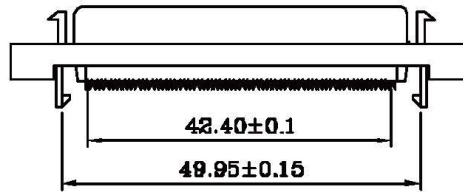

Cover



View A

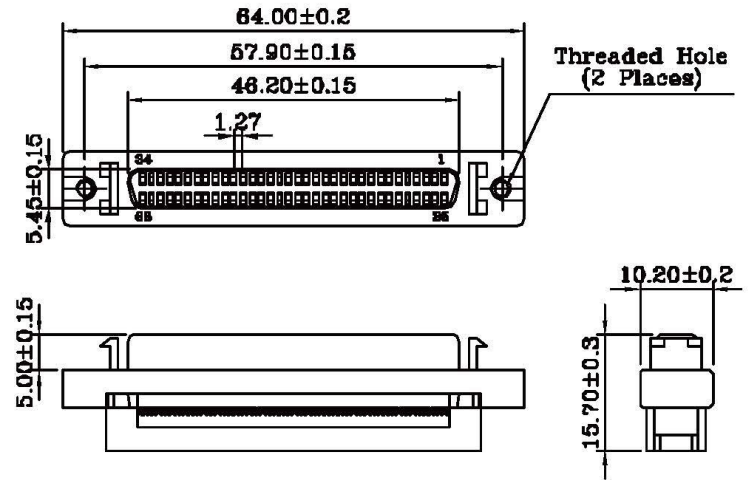

RoHS Compliant

All Connectors


www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettnerstr. 25

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	

SIZE A4 PROJECTION

TOLERANCES ARE

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±



ORDER INFORMATION

HPD-SFL-068-LF
SERIES | LEADFREE
68 WAY
LOCK
IDC
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 68P Female Connector I.D.C For 0.635mm(.025") Flat Cable