

**FEATURES:**

- Half pitch 1.27mm(.050") series
- D-SUB type right angle dip mount connector
- Bracket with latch block and without latch block



- Steel body provide EMI/RFI shielded

**MATERIALS:**

- Housing and cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Shell: Steel, nickel plated over copper
- Bracket: Steel, nickel plated over copper
- Boardlock: Phosphor Bronze tin plated over copper

**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

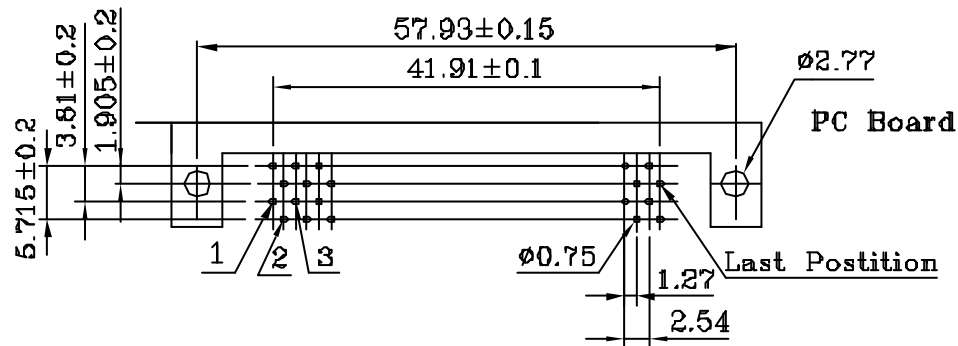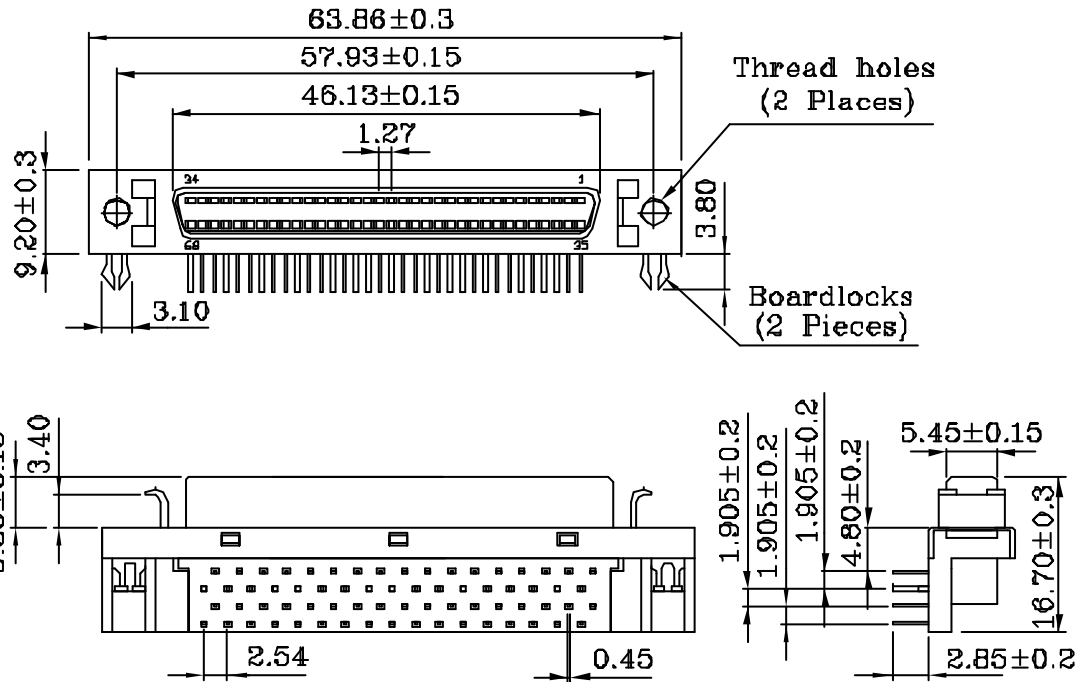

PC Board Mounting Dimensions

**All Connectors**

www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. **HPD-SRL-068**

DWG NO. **HPD-SRL-068**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE