

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic Thermoplastic  
P.B.T UL94V-0 Black

Contacts : Phosphor Bronze Gold  
Selective Plated

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp



Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min



Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C






HPDP-PFS3-068-LF  
LEADFREE  
RoHS Compliant

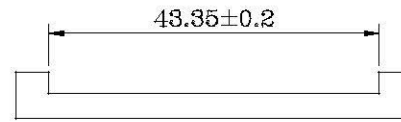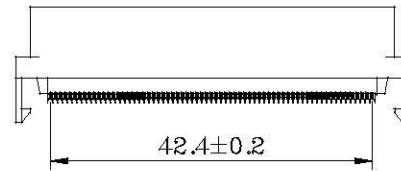

Cover

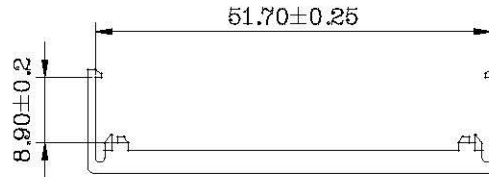

Strain Relief

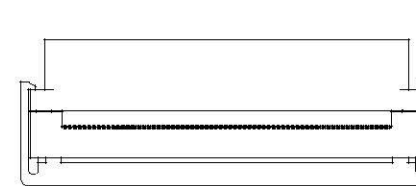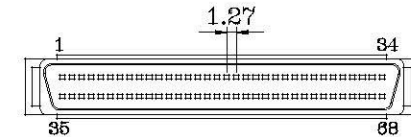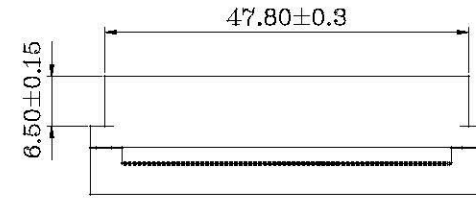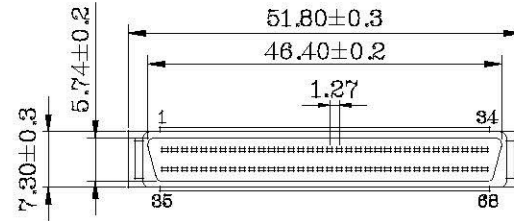

**All connectors**

www.allconnectors.de  
Tel: 0049 711 7003501  
70774 Nürtingen-Geislingen - Germany

info@allconnectors.de  
Fax: 0049 711 7003503  
Kerkerstr. 25

PART NO. HPDP-PFS3-068

DWG NO. HPDP-PFS3-068

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ±  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

1.27mm (.050") Pin Type 68Pos  
Plug Connector For 0.635(.025") Flat  
Ribbon Cable(Unshielded)

AREA

REVISIONS

HK

DATE