





• **MATERIALS:(RoHS Compliant)**

Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +105°C

HPDP-SD-068-LF
 LEADFREE
 RoHS Compliant

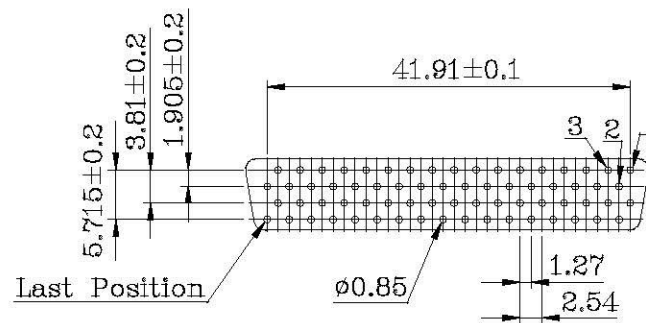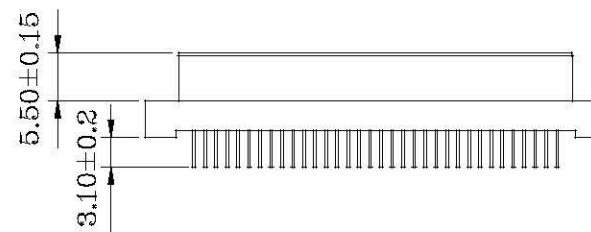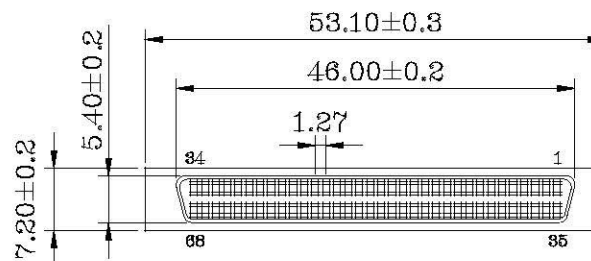

PCB Layout (B)

All Connectors

www.allconnectors.de info@allconnectors.de
 Toll.: 0049 711 2009503 Fax: 0049 711 7009504
 20094 Filderstadt - Germany Kettnerstr. 25

PART NO. HPDP-SD-068

DWG NO. HPDP-SD-068

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ±
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

1.27mm (.050") Pin Type 68Pos
 Receptacles Headers Vertical
 Mount Type (Unshielded)

AREA

REVISIONS

HK

DATE