

RECOMMENDED P.C.B LAYOUT
TOLERANCE ± 0.05
TOP VIEW

MATERIALS

1. HOUSING : THERMOPLASTIC (UL94V-0) BLACK
2. TERMINAL : COPPER ALLOY
GOLD PLASH ON CONTACT AREA
TIN PLATED ON SOLDER TAILS.
UNDER NICKEL PLATED . (t=0.35mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONF MINUTF.
3. INSULATION RESISTANCE : 1000M OHMS MIN.
AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4


TOLERANCES ARE

X ±
X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 3°

PROJECTION



ORDER INFORMATION

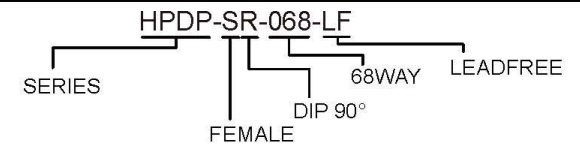

DESCRIPTION: SCSI II 68 PIN W/O B/LOCK G/F PBT