


Machined Pin header connectors 1.778 mm: MPHHS series

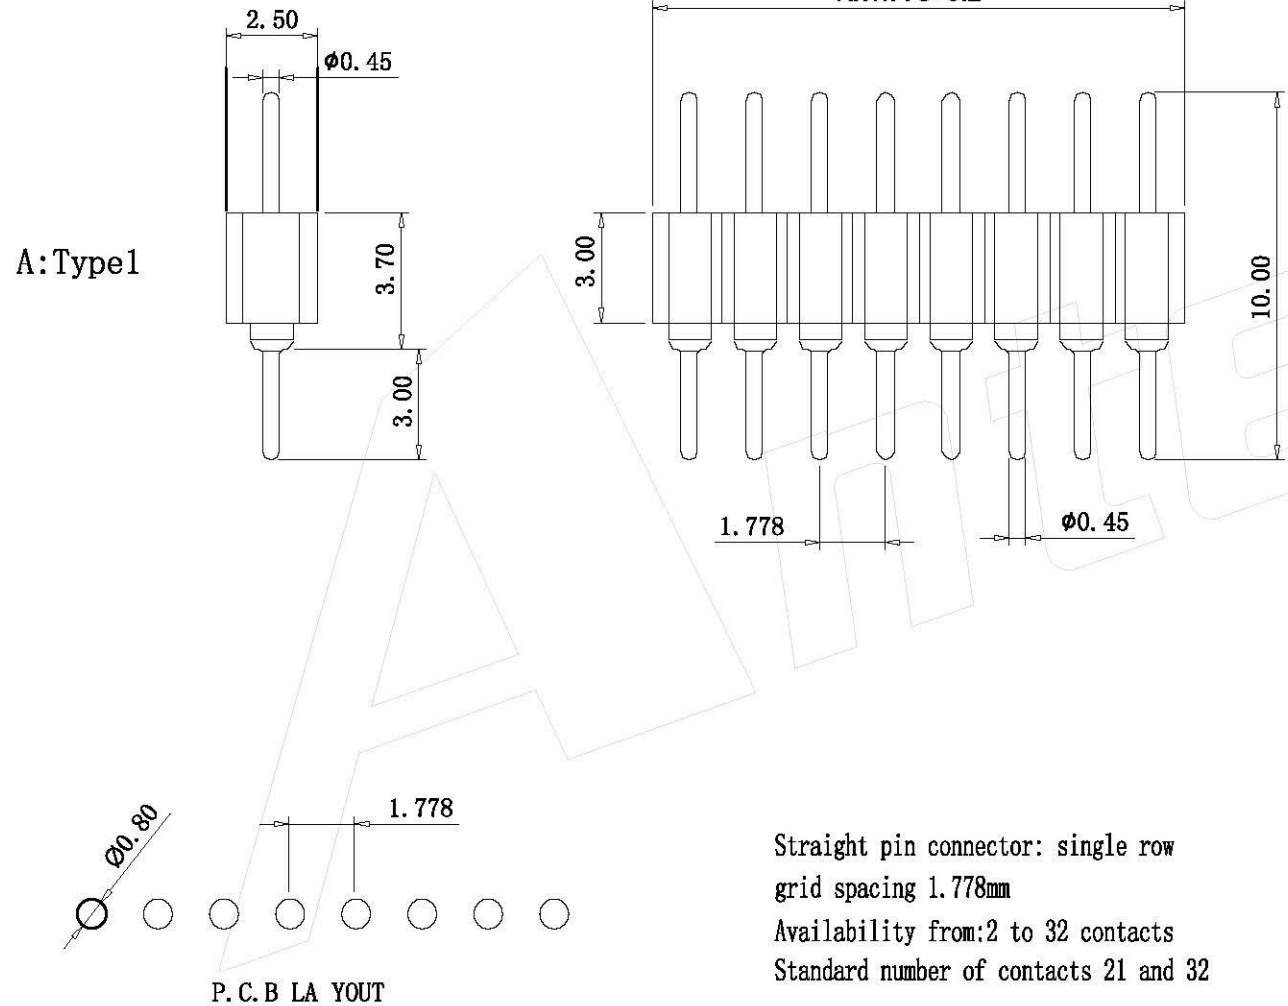

SPECIFICATIONS:

| | |
|----------------------|----------------|
| Insulator: | PPS |
| Fiammability: | UL 94V-0 |
| Sleeve: | Brass |
| Mating pin Ø: | 0.45 mm |
| Mechanical life: | min 500 cycles |
| Rated cument: | 1A |
| Contact resistance: | max 10 mΩ |
| Dielectric strength: | min 1000V RMS |

Ordering Code:

MPHHS - X - X - X - X - 00
 ① ② ③ ④ ⑤ ⑥

- | | |
|---|---|
| ① MPHHS series | ④ Clip Plated |
| ② Contact NO: XX=XXpin For example: 06=06pin | 0; No 1; Tin 150 μ" 2; Tin 200 μ" 3; G/F 4; Gold 3 μ" 5; Gold 10 μ" 6; Gold 15 μ" |
| ③ Pin Plated | S; Special |
| 0; No 1; Tin 150 μ" 2; Tin 200 μ" 3; G/F 4; Gold 3 μ" 5; Gold 10 μ" 6; Gold 15 μ" S; Special | ⑤ Packing |
| | A:Tray B:Bag C:Tube D:Tape Reel |
| | ⑥ Series number |

Straight pin connector: single row
 grid spacing 1.778mm
 Availability from:2 to 32 contacts
 Standard number of contacts 21 and 32

Unless Otherwise specified tolerance
 X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15



www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filzlerstadt Germany Kottmstr. 25

SCALE: 2:1

UNIT:
mm


DRAWN: junfon H

CHECKED: YANG

TITLE:
**Machined Pin header connectors 1.778 mm:
 MPHHS series**

DRAWING NO: MPHHS-XXXXA00

PRODUCT NO: MPHHS-XXXXA00



Add option of plating

10-08-28

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8