

## FEATURES

- \* HIGH DENSITY SOCKETS FOR IC WITH A PITCH OF 1.778 MM
- \* LOW PROFILE DESIGN.
- \* SAVING ON PCB REAL SETATE.
- \* MANUALLY AND AUTOMATICALLY INSERTABLE.
- \* CLOSED BOTTOM DESIGN TO PREVENT SOLDER WICKING.
- \* PROVIDED NEW TYPE FOR FLUX PROTECTION.

## TECHNICAL DATA

### MATERIAL




- \* CONTACT:PHOSPHOR BRONZE.
- \* PLATING:TIN PLATED.
- \* INSULATOR:GLASS FILLED POLYESTER P.B.T. (UL-94 V-0)

### MACHANICAL

- \* OPERATING TEMPERATURES:-55°C~+125°C.
- \* INSERTION FORCE: 450 G
- \* WITHDRAWAL FORCE: 70 G MIN

### ELECTRICAL

- \* CURRECT RATING: 1 AMP. MAX.
- \* CONTACT RESISTANCE: 20M OHM MIN.
- \* WITHSTANDING VOLTAGE: AC 600V/MINUTE.

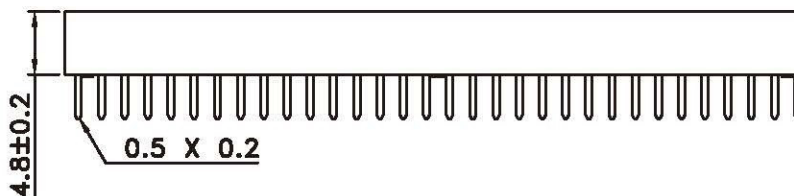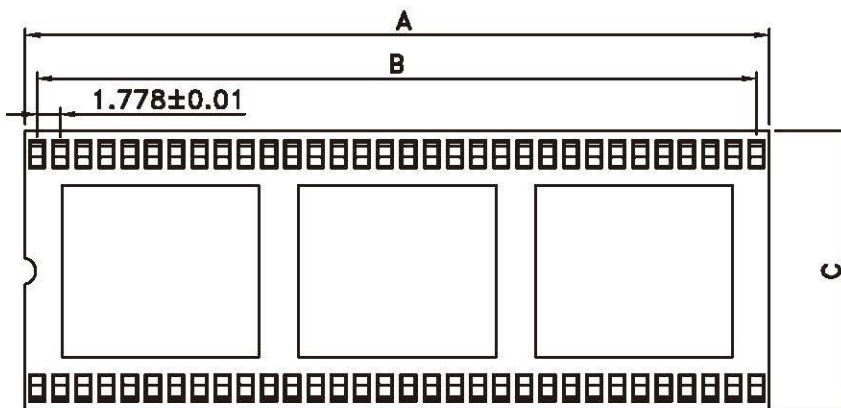

POSITION	A	B	C	D	SPACE
40	35.56	33.78	17.70	15.24	06
42	37.34	35.56	17.70	15.24	
48	42.67	40.89	17.70	15.24	
52	46.23	44.45	17.70	15.24	
54	48.01	46.23	17.70	15.24	
56	49.78	48.01	17.70	15.24	
64	56.90	55.12	17.70	15.24	

RoHS Compliant

TOLERANCES ARE

**All Connectors**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE


SIZE A4

X ±  
X ±  
.XX ±  
.XXX ±  
ANG ±

PROJECTION

照片框

ORDER INFORMATION

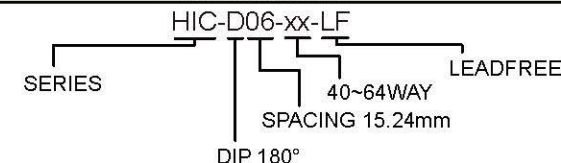

DESCRIPTION: HIGH DESITY 1.778MM IC SOCKET

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7003503

Fax: 0049 711 7003504

70791 Filderstadt - Germany

Kellenersstr. 25