

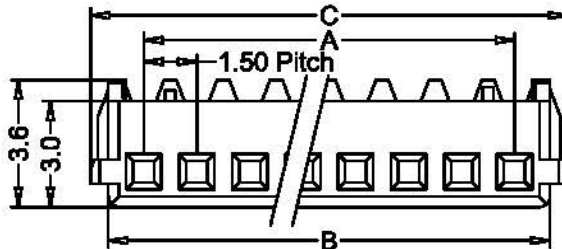



# 1.5mm(.059") Wire To Board Connector

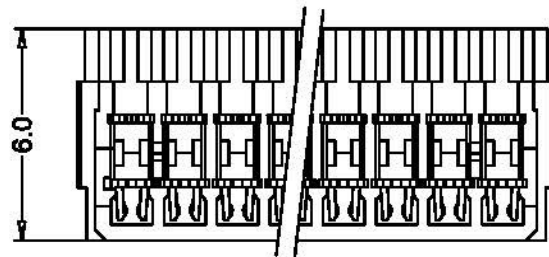

## SPECIFICATIONS:

- Current Rating: 1A AC,DC(#28AWG)  
2A AC,DC(#26AWG)
- Voltage Rating:50V AC,DC
- Operating Temperature:-30℃~+105℃
- Contact Resistance:20mΩ max.
- Insulation Resistance:500MΩ Min.
- Withstanding Voltage:500V AC/minute
- Material:Housing:PA66 UL94V-0  
Contact:Phosphor bronze , Tin plated
- Terminal/Housing Retention Force  
Requirements:1.0kg(Min.)
- Wire Size:UL1571,UL1061,UL3443:AWG #26,#28 Insulation  
Diameter:0.80mm~0.95mm



C	Color	Wire size
G	Gray	AWG#28-#26
B	Black	AWG#28-#26
b	blue	AWG#28-#26

## Ordering Information And Dimensions

Part NO.		Dimensions			Part NO.		Dimensions			Part NO.		Dimensions		
TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C
M15002-2-b	2	1.50	3.50	4.50	M15002-9-b	9	12.00	14.00	15.00	M15002-16-b	16	22.50	24.50	25.50
M15002-3-b	3	3.00	5.00	6.00	M15002-10-b	10	13.50	15.50	16.50	M15002-17-b	17	24.00	26.00	27.00
M15002-4-b	4	4.50	6.50	7.50	M15002-11-b	11	15.00	17.00	18.00	M15002-18-b	18	25.50	27.50	28.50
M15002-5-b	5	6.00	8.00	9.00	M15002-12-b	12	16.50	18.50	19.50	M15002-19-b	19	27.00	29.00	30.00
M15002-6-b	6	7.50	9.50	10.50	M15002-13-b	13	18.00	20.00	21.00	M15002-20-b	20	28.50	30.50	31.50
M15002-7-b	7	9.00	11.00	12.00	M15002-14-b	14	19.50	21.50	22.50					
M15002-8-b	8	10.50	12.50	13.50	M15002-15-b	15	21.00	23.00	24.00					



www.allconnectors.de  
T.L: 0049 711 7009502  
70794 Filderstadt - Germany

info@allconnectors.de  
FAX: 0049 711 7009504  
Kettenerstr. 25