

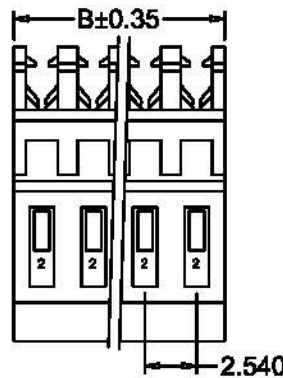
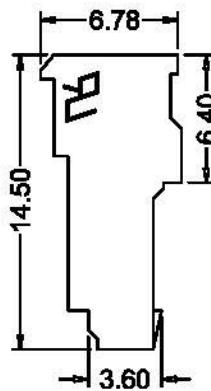



2.54mm(.100") Wire To Wire And Wire To Board Connector



SPECIFICATIONS:

- Current Rating: 3A AC, DC
- Voltage Rating: 250V AC, DC
- Operating Temperature: V2: -25°C ~ +85°C
V0: -40°C ~ +105°C
- Contact Resistance: 10mΩ max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 750V AC/minute
- Material: Housing: Nylon66 UL94V-2/UL94V-0
Terminal: Brass. Tin plated/Gold-plated
- File No: E304945



Ordering Information And Dimensions

Part NO.	Circuits	Dimensions		Part NO.	Circuits	Dimensions		Part NO.	Circuits	Dimensions	
		Dim:A	Dim:B			Dim:A	Dim:B			Dim:A	Dim:B
M2051R-2	2	2.54	5.08	M2051R-10	10	22.86	25.40	M2051R-18	18	43.18	45.72
M2051R-3	3	5.08	7.62	M2051R-11	11	25.40	27.94	M2051R-19	19	45.72	48.26
M2051R-4	4	7.62	10.16	M2051R-12	12	27.94	30.48	M2051R-20	20	48.26	50.80
M2051R-5	5	10.16	12.70	M2051R-13	13	30.48	33.02	M2051R-21	21	50.80	53.34
M2051R-6	6	12.70	15.24	M2051R-14	14	33.02	35.56	M2051R-22	22	53.34	55.88
M2051R-7	7	15.24	17.78	M2051R-15	15	35.56	38.10	M2051R-23	23	55.88	58.42
M2051R-8	8	17.78	20.32	M2051R-16	16	38.10	40.64	M2051R-24	24	58.42	60.96
M2051R-9	9	20.32	22.86	M2051R-17	17	40.64	43.18				



www.allconnectors.de
Tel.: 0049 /11 /009503
70/94 Hilderstadt Germany

Info@allconnectors.de
Fax: 0049 /11 /005501
Kettnerstr. 25