
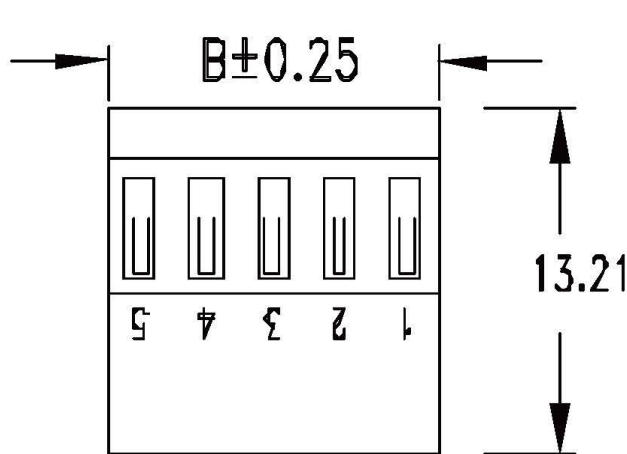


- Closed End type
- Without Polarizing Tabs

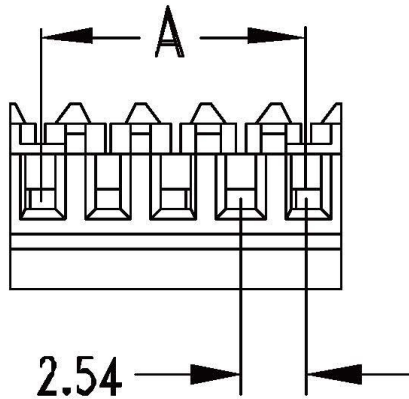


Features:

- 2 ~ 24 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- With or without Polarizing Tabs
- With Locking Ramp
- Feed-Thru and Closed End type
- Wire range: AWG #22 ~ #28 (Flat ribbon wire)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

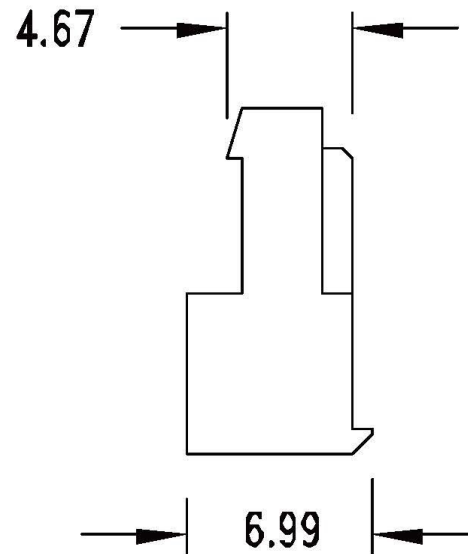

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
xx	2.54 x (xx - 1)	2.54 x (xx)

Note: xx = Number of circuits, 02 ~ 24

Color	Wire size
Red	#22
White	#24
Blue	#26
Green	#28

RoHS Compliant

TOLERANCES ARE

All Connectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PROJECTION

X ±
X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

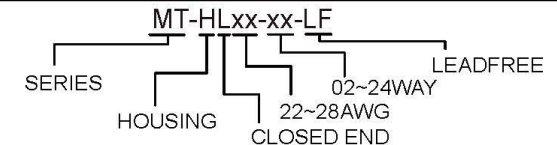

DESCRIPTION:

www.allconnectors.de

Tel.: 0049 711 7002503

71794 Hilderstadt Germany

info@allconnectors.de

Fax: 0049 711 7002504

Ref: 0000012/24