




- Closed End type
- With Polarizing Tabs

Features:

- 2 ~ 24 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- With or without Polarizing Tabs
- With Locking Ramp
- Feed-Thru and Closed End type
- Wire range: AWG #22 ~ #28 (Flat ribbon wire)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

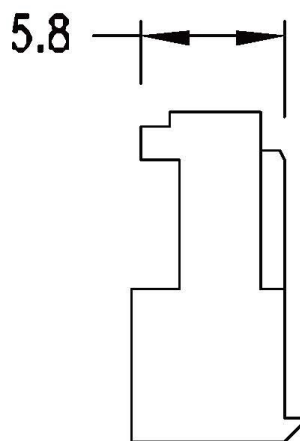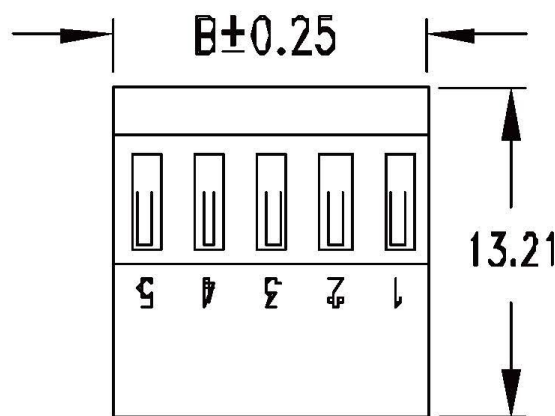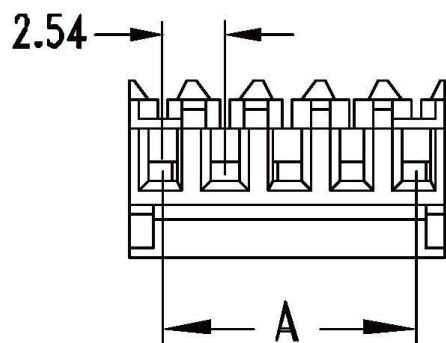

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
xx	2.54 x (xx - 1)	2.54 x (xx)

Note: xx = Number of circuits, 02 ~ 24

Color	Wire size
Red	#22
White	#24
Blue	#26
Green	#28

RoHS Compliant

All Connectors


www.allconnectors.de
Tel.: 0049 711 7009503
70734 Filztersbach - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kellnersstr. 25


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

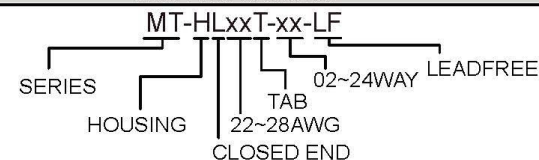

DESCRIPTION: