



2.0mm(.079") Wire To Board Connector

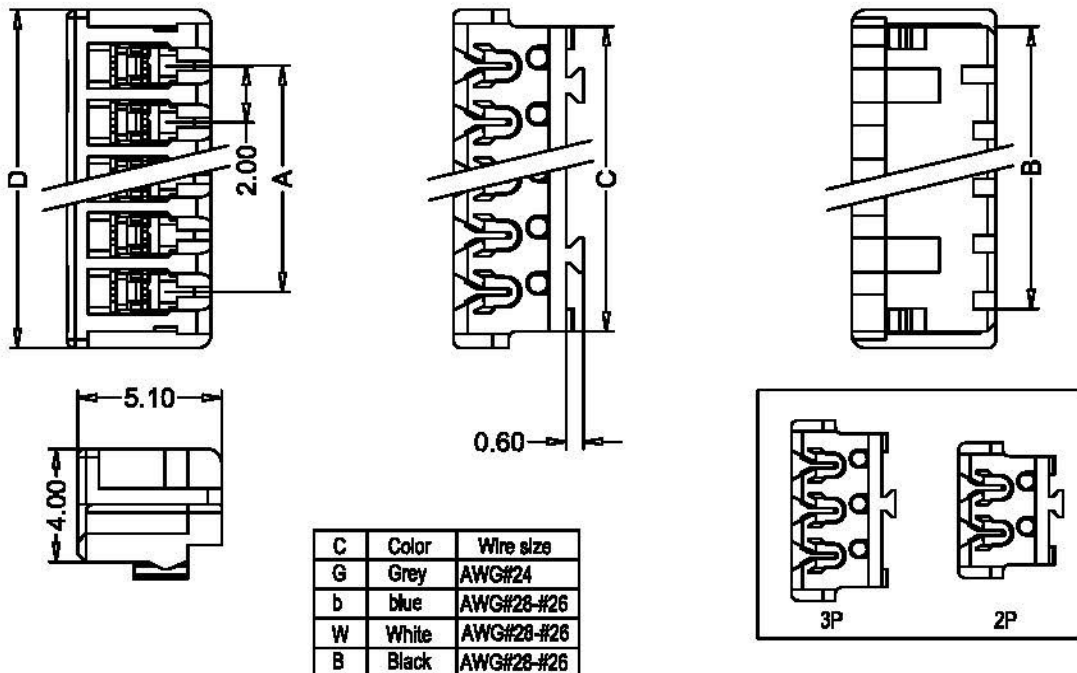

SPECIFICATIONS:

- Current Rating:1A AC,DC #28AWG
2A AC,DC #26AWG
3A AC,DC #24AWG
- Voltage Rating:125V AC,DC
- Operating Temperature:-30°C--+105°C
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:1000V AC/minute
- Material:Housing:Polyester UL94V-0
Terminal:Phosphor bronze , Tin plated
- Wire Size:UL1571,UL1061,UL3443:AWG #26,#28 Insulation Diameter:0.83mm~1.05mm AWG#24 Insulator Diameter:1.1mm~1.25mm
- Terminal In Housing Retention Force Requirements:0.2kg(Min.)

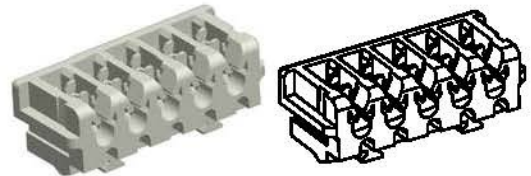

Ordering Information And Dimensions

Part NO.		Dimensions				Part NO.		Dimensions			
TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	Dim:D	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	Dim:D
M2002-2-W	2	2.00	4.00	4.80	5.99	M2002-9-W	9	16.00	18.00	18.80	19.99
M2002-3-W	3	4.00	6.00	6.80	7.99	M2002-10-W	10	18.00	20.00	20.80	21.99
M2002-4-W	4	6.00	8.00	8.80	9.99	M2002-11-W	11	20.00	22.00	22.80	23.99
M2002-5-W	5	8.00	10.00	10.80	11.99	M2002-12-W	12	22.00	24.00	24.80	25.99
M2002-6-W	6	10.00	12.00	12.80	13.99	M2002-13-W	13	24.00	26.00	26.80	27.99
M2002-7-W	7	12.00	14.00	14.80	15.99	M2002-14-W	14	26.00	28.00	28.80	29.99
M2002-8-W	8	14.00	16.00	16.80	17.99	M2002-15-W	15	28.00	30.00	30.80	31.99

