

C	Color	Wire size
3	Orange	#18
4	Yellow	#20
2	Red	#22
9	White	#24
6	Blue	#26

### Features:

- 2 ~ 18 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- With or without locking ramp and polarizing tabs
- Feed-Thru and Closed End type
- Wire range: AWG #18 ~ #26 ( Flat ribbon wire )

### Specification:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC Max.
- Contact resistance: Initial value/10mΩ Max.  
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C  
( Including temperature rise )

### Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.96±0.10	7.92	11	39.60±0.25	43.56
3	7.92±0.15	11.88	12	43.56±0.25	47.52
4	11.88±0.15	15.84	13	47.52±0.30	51.48
5	15.84±0.15	19.80	14	51.48±0.30	55.44
6	19.80±0.20	23.76	15	55.44±0.30	59.40
7	23.76±0.20	27.72	16	59.40±0.30	63.36
8	27.72±0.20	31.68	17	63.36±0.30	67.32
9	31.68±0.20	35.64	18	67.32±0.35	71.28
10	35.64±0.25	39.60			

**All Connectors**


www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettenerstr. 25

**RoHS Compliant**


DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE  
SIZE A4 PROJECTION

TOLERANCES ARE

X ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

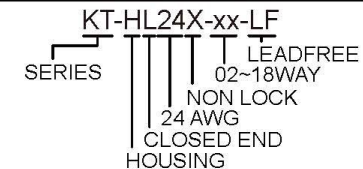

DESCRIPTION: