


▽ DIP2 PITCH 2.54MMX7.62MM I.D.C. DIP PLUG
FOR PITCH 1.27MM CENTER FLAT RIBBON CABLE

MATERIAL & FINISH

- *INSULATOR: PBT+GLASS FIBER UL 94V-0
- *CONTACT: BRASS
- *FINISH: GOLD-PLATED OVER NICKEL

SPECIFICATIONS

- *CURRENT RATING: 1A AC,DC
- *VOLTAGE RATING: 250V AC,DC
- *TEMPERATURE RANGE: -40°C TO +105°C
- *CONTACT RESISTANCE: 20MΩ MAX
- *INSULATION RESISTANCE: 1,000MΩ MIN
- *WITHSTANDING VOLTAGE: 500V AC/MIN

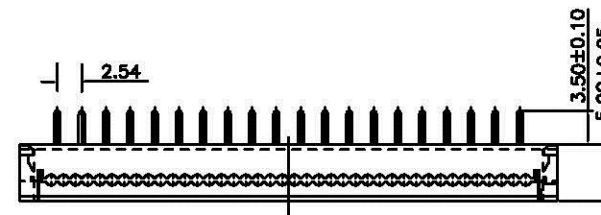

PART NO	DIM A	DIM B
IP03-C2-08	7.62	15.42
IP03-C2-10	10.16	17.96
IP03-C2-14	15.24	23.04
IP03-C2-16	17.78	25.58
IP03-C2-18	20.32	28.12
IP03-C2-20	22.86	30.66

PART NO	DIM A	DIM B
IP03-C2-24	27.94	35.74
IP03-C2-26	30.48	38.28
IP03-C2-28	33.02	40.82
IP03-C2-34	40.64	48.44
IP03-C2-40	48.26	56.06

DIMENSIONS:MM

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009900
70791 Filzbergstadt - Germany

info@allconnectors.de
fax: 0049 711 7009904
Kellernstr. 25

PART NO. IP03-C2-xx

DWG NO. IP03-C2-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X
XX
XXX
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE