



MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:3000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:500V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.



DIMENSION			
CONTACT	A	B	C
06P	12.18	05.08	1.90
08P	14.72	07.62	1.90
10P	17.26	10.16	3.60
12P	19.80	12.70	3.60
14P	22.34	15.24	3.60
16P	24.88	17.78	3.60
18P	27.42	20.32	3.60
20P	29.96	22.86	3.60
24P	35.04	27.94	3.60
26P	37.58	30.48	3.60
30P	42.66	35.56	3.60
34P	47.74	40.64	3.60
40P	55.36	48.26	3.60
50P	68.06	60.96	3.60

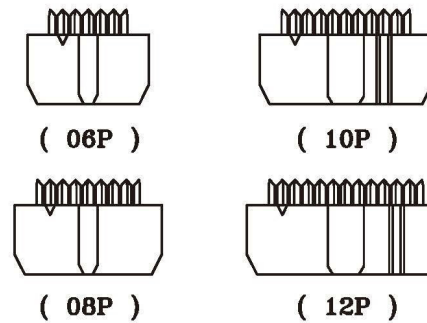

RoHS Compliant

Allconnectors

www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettenerstr. 25


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4

TOLERANCES ARE
 X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PROJECTION




ORDER INFORMATION

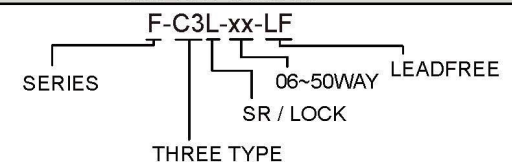

DESCRIPTION:

CONTACTS	A	B	CONTACTS	A	B
10P	13.70	13.00	26P	34.00	33.20
①: 14P	18.78	18.08	③: 30P	39.08	38.28
16P	21.30	20.60	34P	44.48	43.58
20P	26.38	25.60	40P	52.10	51.20
24P	31.46	30.68			

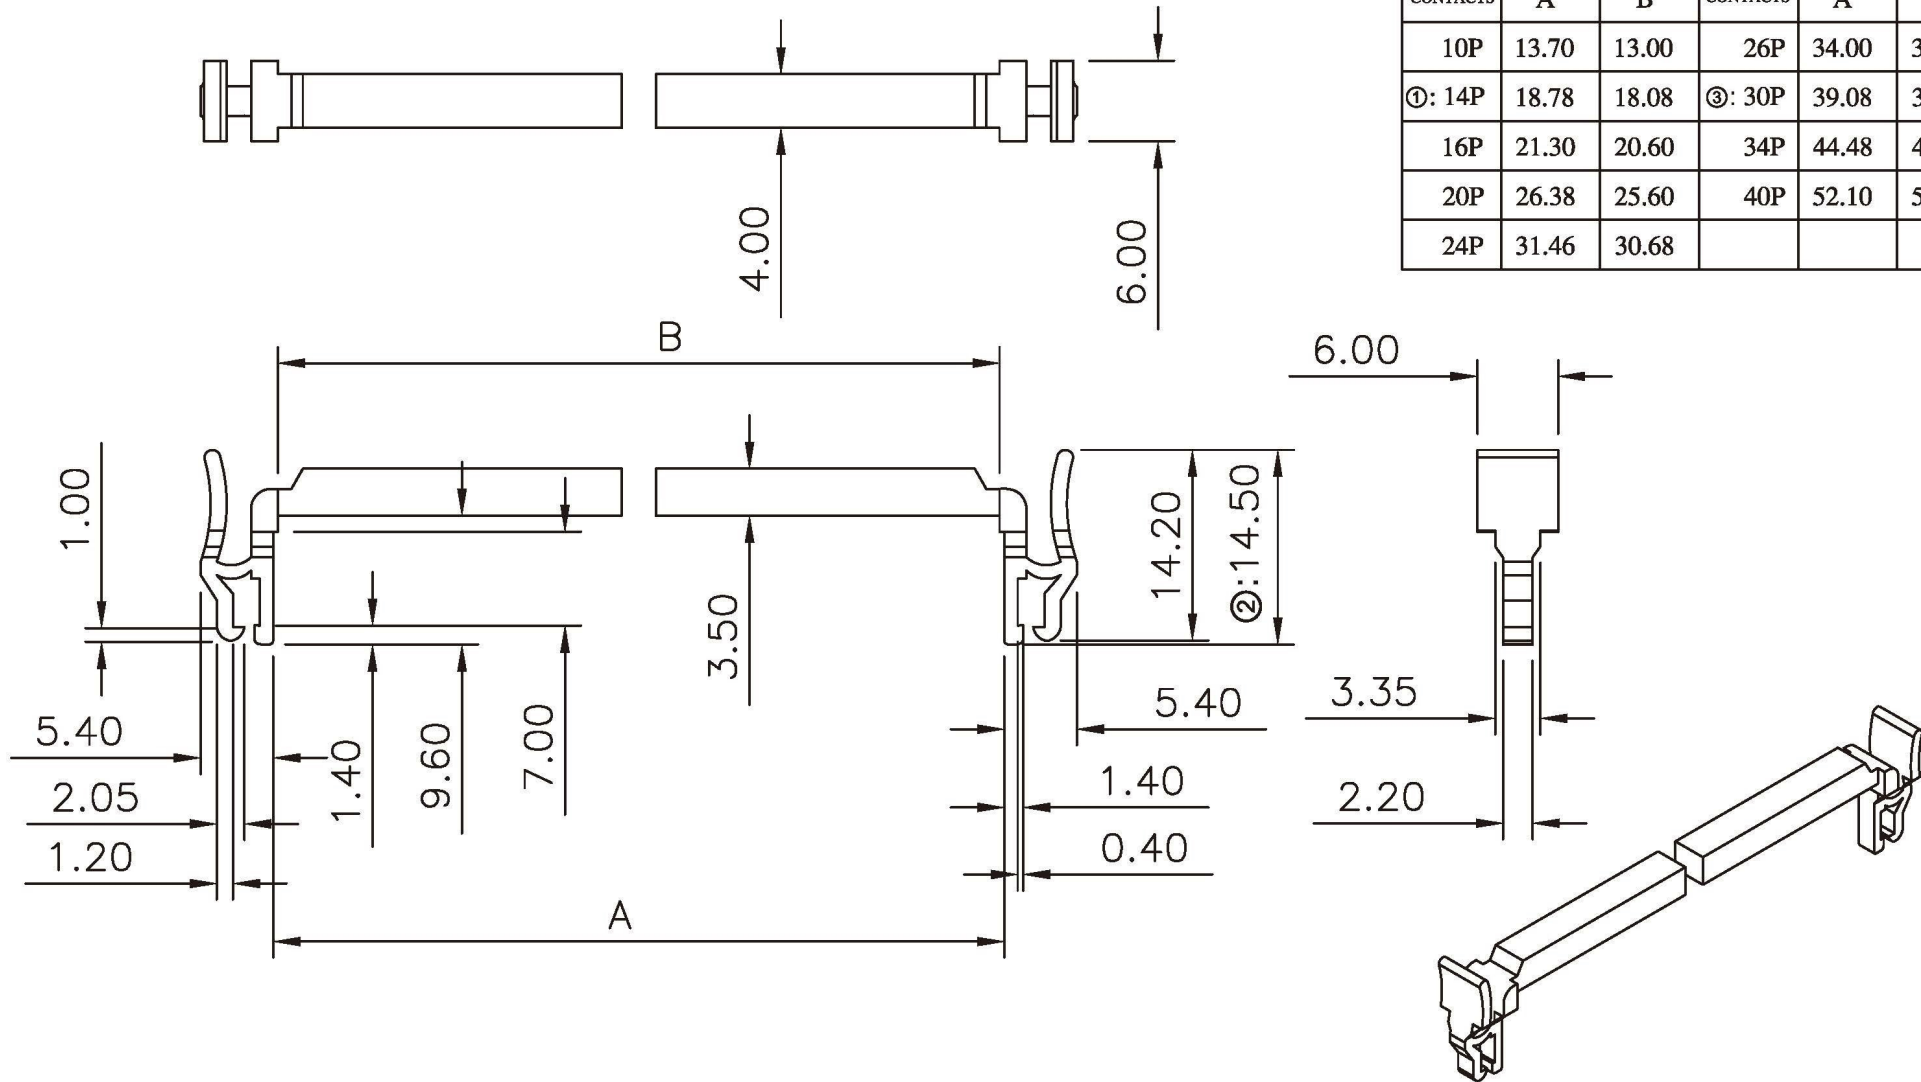

RoHS Compliant

TOLERANCES ARE

Allconnectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PROJECTION

X ±
X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

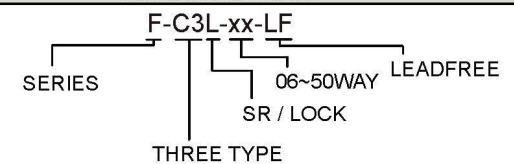

DESCRIPTION:

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25