

POSITION	A	B
06P	8.01	2.54
08P	9.28	3.81
10P	10.55	5.08
12P	11.82	6.35
14P	13.09	7.62
16P	14.36	8.89
20P	16.90	11.43
22P	18.17	12.70
26P	20.71	15.24
30P	23.25	17.78
34P	25.79	20.32
40P	29.60	24.13
44P	32.14	26.67
50P	35.95	30.48
60P	42.30	36.83
68P	47.38	41.91
80P	55.00	49.53

## SPECIFICATIONS

### Material

Insulator : PBT glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

### Electrical

Current Rating : 0.5Amp



Contact Resistance : 30 m ohms max.

Insulation Resistance : 1000 M ohms min.

Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40° ~ +105°

► Flat ribbon cable with 0.635mm pitch.

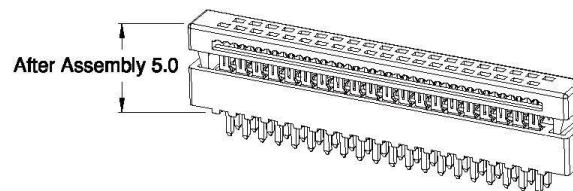

P.C.B. LAYOUT

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettenerstr. 25


**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/ mm SCALE 1 : 1  
DATE  
SIZE A4


TOLERANCES ARE

X ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION

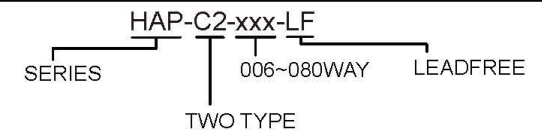

DESCRIPTION: