


MATERIAL:
 CONTACT: BRASS,GOLD AND TIN PLATED,
 NICKEL UNDER PLATED.
 HOUSING.COVER.LATCH:PBT+30%CIASS FIBER UL94V-0.
 All materials must be GP materials


RATING:
 WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 CURRENT:1AMPERE
 INSULATION RESISTANCE :1000M.Ω MAX.
 CONTACT RESISTANCE:20mΩ MAX.
 TEMPERATURE:-40°C TO 105°C.

PIN Q'TY	A	B
2*5	10.54	5.08
2*6	11.81	6.35
2*7	13.08	7.62
2*8	14.35	8.89
2*10	16.89	11.43
2*13	20.70	15.24
2*15	23.24	17.78
2*17	25.78	20.32
2*20	29.50	24.13
2*22	32.13	26.67
2*25	35.94	30.48
2*30	42.29	36.83
2*34	47.37	41.91
2*40	54.99	49.53
2*50	67.69	62.23



Ordering Information

IDCIF - X 1 X X

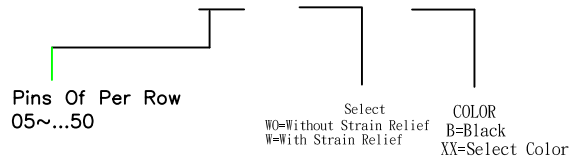

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	All Connectors	
X. ±	X' ±5°	Andy	2009.08.12	www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ±0.38	.X' ±2°	CHECK	DATE	FILE NAME	1.27MM IDC
.XX ±0.25	.XX' ±1°	APPRO.	DATE	PART NO	IDCIF-X1X
.XXX ±0.13	.XXX' ±0.5°	A4		DRAWING NO.	IDCIF-01
UNIT:mm	SCALE 1:1			REV.	AO
SHEET: 1 of 1					