

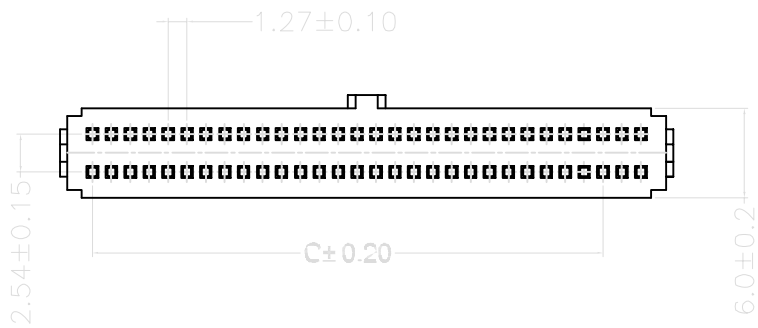


MATERIAL:
 CONTACT: BRASS,GOLD AND TIN PLATED,
 NICKEL UNDER PLATED.
 HOUSING,COVER,LATCH:PBT+30%CIASS FIBER UL94V-0.
 All materials must be GP materials


RATING:
 WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 CURRENT:1AMPERE
 INSULATION RESISTANCE :1000MΩ MAX.
 CONTACT RESISTANCE:20mΩ MAX.
 TEMPERATURE:-40°C TO 105°C.

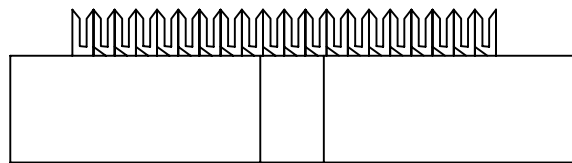

PARTNO	DIMA	DIMB	DIMC
2*5	11.25	8.35	5.08
2*6	13.79	10.89	7.62
2*7	15.06	12.16	8.89
2*8	17.60	14.70	11.43
2*10	21.41	18.51	15.24
2*13	23.95	21.05	17.78
2*15	26.49	23.59	20.32
2*17	30.30	27.40	24.13
2*20	36.65	33.75	30.48
2*25	43.00	40.10	36.83
2*30	48.08	45.18	41.91
2*40	55.69	52.85	49.53
2*50	68.4	65.5	62.23

Ordering Information

IDCJF - X 1 X X

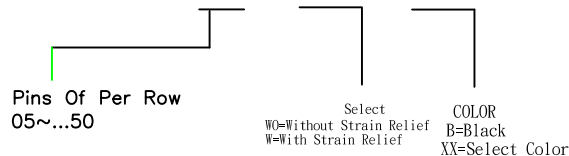

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ± 0.38	X' ±5°	Andy	2009.08.12
.XX ±0.25	.X' ±2°	CHECK	DATE
.XXX ±0.13	.XX' ±1°	APPRO.	DATE
	.XXX' ±0.5°		
UNIT:mm	SCALE 1:1		
A4	SHEET: 1 of 1		

All Connectors	
www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME	1.27MM IDC
PART NO	IDCJF-X1XX
DRAWING NO.	IDCJF-01
	REV.AO