








RoHS compliant

SPECIFICATION

Current Rating: 0.5 Amp
 Insulation Resistance: 1000 Megohms min
 Contact Resistance: 30 m ohms Max
 Dielectric Withstanding: AC 300 V
 Operating Temperature: -55 ° C to +105° C

Material and Finish:

Insulator Material: PBT+GF30% UL94V-0, Color: Black
 Contact Material: Phosphor Bronze
 Contact Plated: Goldflash over Nickel
 Control Dimension Indicated From "▲"

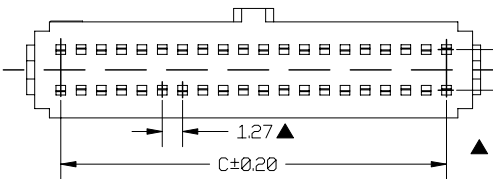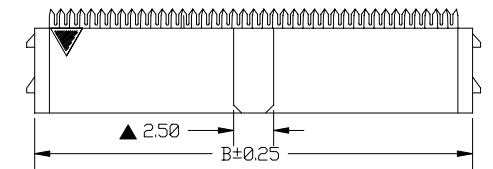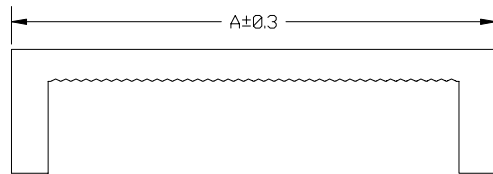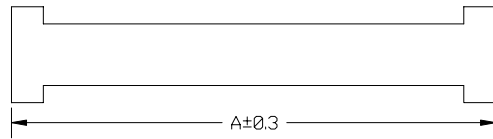

PINS	A	B	C
10P	11.25	8.35	5.08
14P	13.79	10.89	7.62
16P	15.06	12.16	8.89
20P	17.60	14.70	11.43
26P	21.41	18.51	15.24
30P	23.95	21.05	17.78
34P	26.49	23.59	20.32
40P	30.30	27.40	24.13
50P	36.85	33.75	30.48
60P	43.00	40.10	36.83
68P	48.08	45.18	41.91
80P	55.70	52.80	49.53
100P	68.40	65.50	62.23

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG.
 0.
 0 ±0.25
 .00 ±0.2

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

SCALE: AS SHOWN UNIT: mm

DRAWN
 CHECKED
 APPROVED

TITLE:
 1.27 × 2.54 IDC SOCKET
 DRAWN NO: ID127-1
 PRODUCT NO. ID127-1

REV	DESCRIPTION	DATE