

RoHS compliant


SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 1000 Megohms min
 Contact Resistance: 30 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:




ID127- X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact
10 16 20 26
34 40 50
- ③ Special Function
A: W/O Stain Relief
W Bar
B: W/O Stain Relief
W/O Bar
- ④ Contact Plating
A: Gold Flash
B: 10u" Gold
E: 3u" Gold
- ⑤ Code Packing
B: Tray

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>		
		SCALE: AS SHOWN UNIT: mm	TITLE: 1.27mm IDC Socket
		DRAWN CHECKED APPROVED	DRAWN NO: ID127-XXXX-1 PRODUCT NO. ID127-XXXX

Dimensional Information

Circuits	Dim.A± 0.20	Dim.B± 0.20
10	10.54	5.08
16	14.35	8.89
20	16.89	11.43
26	20.70	15.24
30	23.24	17.78
34	25.78	20.32
40	29.59	24.13
50	35.94	30.48

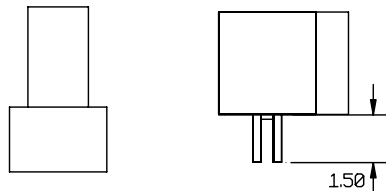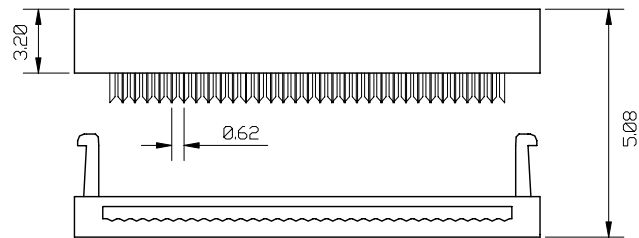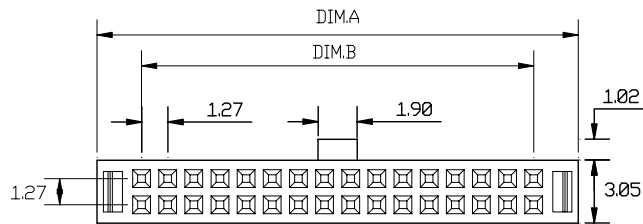

REV	DESCRIPTION	DATE