




REV	ECN. NO.	APPD.
A	DC04152	T.K MENG 8/7/2014

NOTE:
 1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 2. CONTACT RETENTION FORCE: 1.91 kg MIN.
 INSERTION FORCE: 420 GM MAX. PER CONTACT.
 WITHDRAWAL FORCE: 28 GM MIN. PER CONTACT. IPIN GAUGE SD. 0.64 mm


3. PROD. NO. LIST:

- G2- N-N-N NN
- C0= COLOR BLACK
 - C1= COLOR BLUE
 - C2= COLOR GREEN
 - C3= COLOR YELLOW
 - C4= COLOR RED
 - C5= COLOR WHITE
 - NONE= HOUSING MATERIAL PBT
 - A= HOUSING MATERIAL PA6T
 - CONTACT PLATING:
 - 1=10u" MIN TIN/LEAD PLATING OVER ALL
 - 2= GOLD FLASH OVER ALL
 - 8= 15u" MIN. GOLD
 - 0= LOOSE PIECE
 - 1= STRIP OF 10 PIECES

4. OPERATION TEMPERATURE : -55°C-105°C

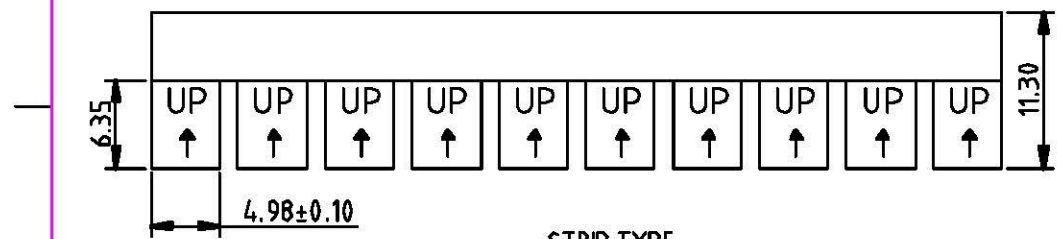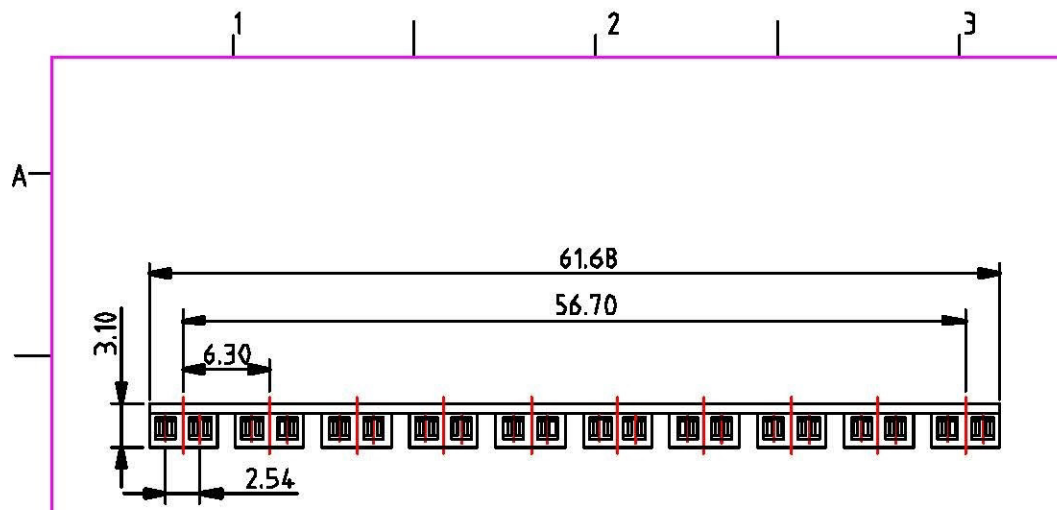

STRIP TYPE

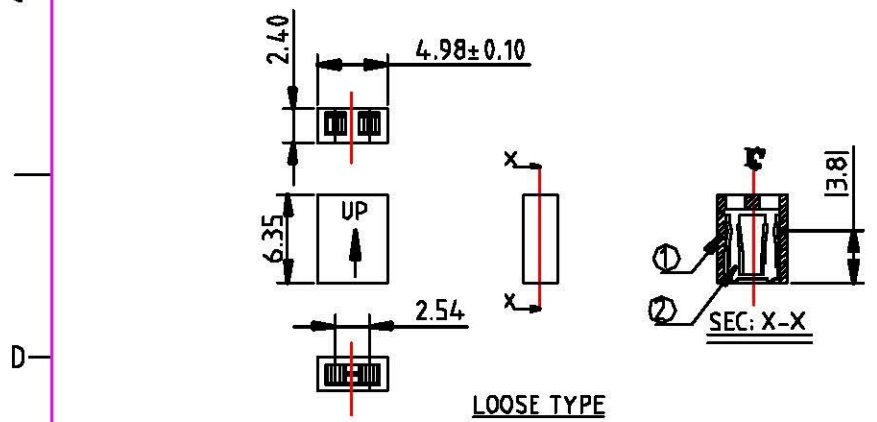

LOOSE TYPE

②	10	CONTACT, PHOSPHOR BRONZE
①	1	HOUSING, PBT OR PA6T UL94V-0 30% G/F
ITEM	Q'TY	DESCRIPTION

COMPONENT PARTS LIST

X±	.X± 0.25	.XX± 1.21	NAME-INTENDED USE->	All Connectors JUMPER CONNECTIONS GENERAL PURPOSE PRODUCTS
X°±	.X°±	.XX°±	JUMPER CONN.	
UNITS:	mm	DATE: 8/1/2014	PART NO.-INTENDED USE->	TITLE:
MAT'L			G2 SERIES	CUSTOMER DRAWING
			APPD: T.K MENG	DWG NO.
			CHKD: GUOCHAO YAN	111-0002-305
			DR: TANG HAIQING	SCALE SHEET REV
				N/A 1/1 A