REV	ECN. NO.	APPD.
A	DC04058	T. K MENG 8/1/2014

NOTE: UNLESS DTHERWISE SPECIFIDE

1. OPERATIDN TEMPERATURE : -55°C-115°C
2. CONTACT RETENTIDN FORCE: 0.91 kg MIN.
   INSERTION FORCE: 420 GM MAX. PER CONTACT.|PIN GAUGA SQ. 0.64mm|
   WITHDRAWAL FORCE: 28 GM MIN. PER CONTACT.|PIN GAUGE SQ.0.64 mm|

3. G3 -N- □ □□

- C0= COLOR BLACK
- C1= COLOR BLUE
- C2= COLOR GREEN
- C3= COLOR YELLOW
- C4= COLOR RED
- C5= COLOR WHITE

- NONE: HOUSING MATERIAL PBT
- A: HOUSING MATERIAL PA6T

- CONTACT AREA PLATED
- 2= GOLD FLASH
- B= 15u" GOLD

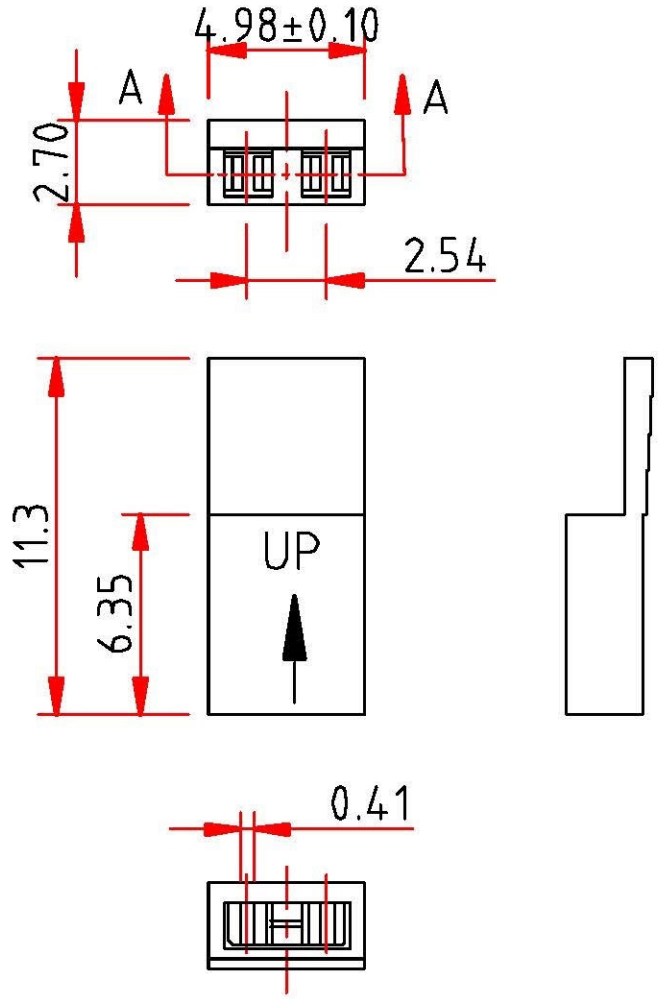

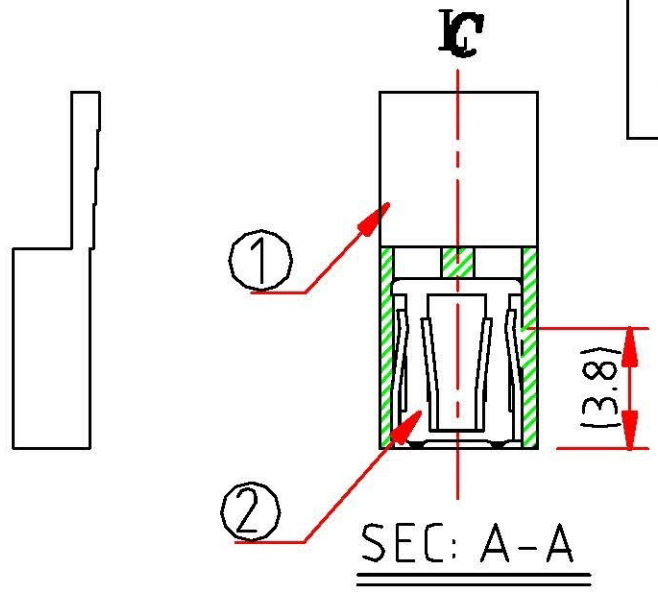

ITEM	Q'TY	DESCRIPTION
②	1	CONTACT,PHOSPHOR BRONZE
①	1/1D	HOUSING, PBT OR PA6T UL94V-0 30% G/F

COMPONENT PARTS LIST

X.±	.X± 0.25	.XX± 0.15
X°.±	.X°±	.XX°±
UNITS: mm	DATE: 8/1/2014	
MAT'L		

NAME<INTENDED USE>	JUMPER CONN.
PART NO.<INTENDED USE>	G3 SERIES
APPD:	T. K MENG
CHKD:	GUDCHAO YAN
DR:	TANG HAI QING

All Connectors

TITLE: CUSTOMER DRAWING

DWG NO. D10-0002-325

SCALE	SHEET	REV
N/A	1/1	A