

.100"(2.54mm) Mini Jumper

Specifications:



- Current rating: 3A
- Withstand voltage: AC 500V/minute
- Insulation resistance: 5000M Ω Min., 500V DC/minute
- Temperature range: -40 °C ~ 105 °C

J-254-x Series Mini Jumper



inches
mm

- Contact material: Brass
- Insulator material: Polyester, UL 94V-0
- Open type or close type
- Easiest way of programming by simply connecting contact points together.
- Easy applied-No soldering.
- All side stackable.
- Low cost alternative to DIP switch.
- Mates with 6502, 6503, 6504, 6508, 6522, 6523, 9920 headers
- Standard color: Black



J-254-1

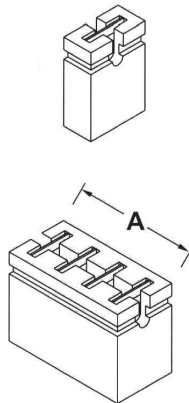



J-254-2



J-254-3

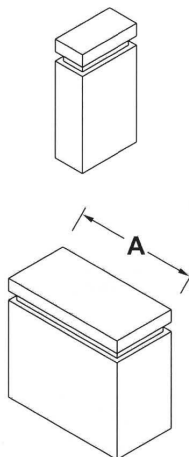

J-254-4



Note:

A = 2.54 x N
 (N = 4 ~ 20)