

## MCX

MCX (Micro-Coax) series is with a "Snap On" coupling interface, which provides rapid and easy connections. It is similar to the SMB connectors, but this series offers approximately a 30% reduction in size. The impedance of the MCX is 50 or 75 ohms, and it can be operated up to the frequencies of 6GHz. The MCX range is suitable for the standard ranges of flexible & semi-rigid cables, and it is also available as a PCB mounted version.

### Applications:


\*GPS \*cellular telephone \*data telemetry \*instrumentation \*wireless \*PC/LAN

Interface dimensions conformable to the Standards:

International: IEC 169-36

European: CECC 22220

### MCX Interface Dimensions:

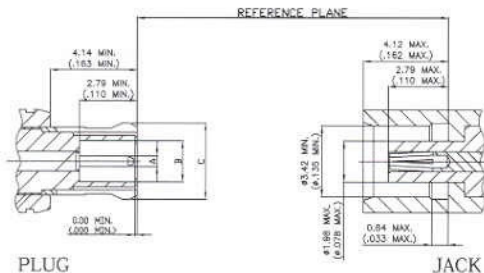

MCX Series				
	PLUG		JACK	
	Minimum	Maximum	Minimum	Maximum
A	0.48(.019)	0.53(.021)		
B	2.00(.097)	2.07(.081)		
C	3.72(.146)	3.80(.150)		

\*Millimeters(Inches)