

SMB Series

ANALOG CONNECTORS
 1-800-441-4844
 77946 Mexico, Germany

VIDEO CONNECTORS
 1-800-441-4844
 International

SMB/MINI-SMB (75ohm)

SMB (Sub-Miniature-B) series incorporates a "Snap On" latching action, which provides rapid and easy connections. The impedance of this series can be controlled at 50 ohms & 75 ohms (the 75 ohm version is also known as MINI-SMB connector), and it can be operated respectively up to 4GHz and 2GHz. The SMB is suitable for the standard ranges of flexible & semi-rigid cables, and it is also available as a PCB mounted version.

Applications:


*test and measurement *instrumentation *telecommunications *video systems *PC/LAN
 *microwave components *base stations *radio boards *wireless

Interface dimensions conformable to the Standards:

International: IEC 169-10

USA: MIL-C-39012

SMB 50ohm Interface Dimensions:

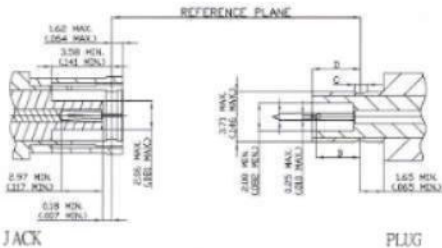

SMB Series					
PLUG			JACK		
Minimum	Maximum		Minimum	Maximum	
			0.48(019)	0.53(021)	A
			2.39(094)	2.97(117)	B
			0.69(027)	0.94(037)	C
			3.33(131)	3.58(141)	D

*Millimeters(Inches)