

UHF Series

All Connectors

NO. 2 INDUSTRIAL
4-101-71 8-10
TINIAN (New) Ferry

NO. 2 INDUSTRIAL
1-0-0117 4-0-0
TINIAN 27



UHF

UHF series is a low cost and low frequency connector, which is supplied with a threaded coupling interface. Because of the non-constant impedance, the maximum usable frequency of UHF connector is limited to 300MHz. Meanwhile, the plug version of UHF connector is generally referred to as the PL-259 connector due to its military part number designation. The UHF is suitable for the flexible cables up to 11.0mm (0.433" in diameter).


Applications:

*CB radios *public address systems *antennas

Interface dimensions conformable to the Standards:

International: IEC 169-12

UHF Interface Dimensions:

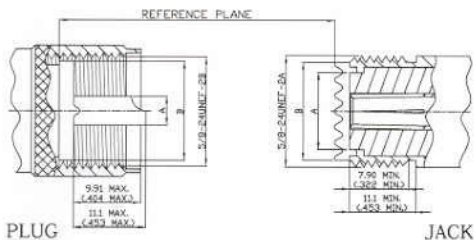

UHF Series					
PLUG			JACK		
	Minimum	Maximum	Minimum	Maximum	
A	3.91(.154)	4.01(.158)	11.56(.464)	12.22(.450)	A
B	11.56(.471)	12.22(.450)	14.00(.571)	14.25(.581)	B

*Millimeters(Inches)