

*****CONSTRUCTION:**

1.CABLE: * UL2725(1PR/28#)+(2C/24#)+AEB65% OD:4.7mm BLACK COLOR.

*****CONNECTORS:**

- 2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD FLASH.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
 * GASKET: SILICONE RUBBER BLACK COLOR.
 * FERRULE: BRASS WITH NICKEL PLATED.
 * MOLDED: PVC 45P BLACK COLOR.
- 3.USB A/M: * USB "2.0" A TYPE MALE SOLDER TYPE.
 * PINS: BRASS WITH 30u GOLD PLATED.
 * INSULATOR: WHITE COLOR P.B.T UL 94-0 RATED.
 * SHELL: STEEL WITH NICKEL PLATED.
 * MOLDED: PVC 45P BLACK COLOR.
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 6.MATERIAL: * MATERIAL WITH RoHS GRADE.

PIN OUT

M12-5P/F		USB A/M
1	RED 24#	1
2	WHITE 28#	2
4	GREEN 28#	3
3	BLACK 24#	4


All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25


RoHS Compliant

TOLERANCES ARE

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

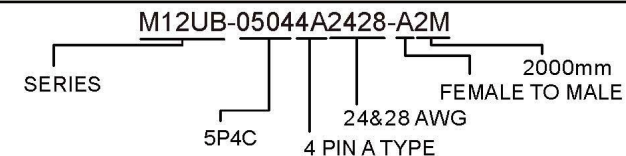

DESCRIPTION: M12-5PIN FEMALE TO USB A TYPE MALE