


M12-5PIN FEMALE  
MOLDED PUR GRAY

M12x1



FRONT VIEW

PIN OUT

M12-5PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC
5	GRAY	NC
COUPLING NUT	DRAIN WIRE	NC


(L=6'±2")  
(L=15'±6")  
(L=25'±1")

**Allconnectors**


www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettnerstr. 25

<b>RoHS Compliant</b>		TOLERANCES ARE
DRAWING BY CY	CHECKED BY GENIUS	X.± .X± .XX± .XXX± ANG±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PROJECTION	



ORDER INFORMATION

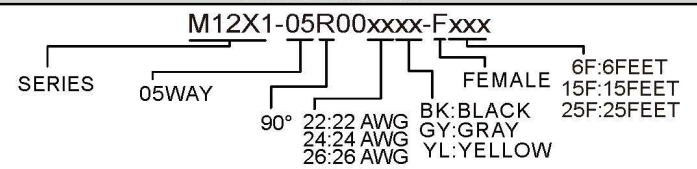

DESCRIPTION: M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)

**\*\*\*CONSTRUCTION:**

1.CABLE: \* UL2464 (5C/ 22#24#26#)+(ALUMINUM-MYLAR FOIL+ 22#24#26# DRAIN WIRE)  
OD:5.2mm COLOR PVC JACKET.

**\*\*\*CONNECTORS:**

2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.  
\* PIN: BRASS WITH GOLD PLATED.  
\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
\* O-RING: SILICONE RUBBER RED COLOR.  
\* FERRULE: BRASS WITH NICKEL PLATED.  
\* MOLDED: PUR GRAY COLOR.

3.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GRSEC-XX WWW.TTCO.COM"

4.TEST: \* CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: \* CURRENT RATING: 2A VOLTAGE RATING: 250V

6.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: \* PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: \* MATERIAL WITH RoHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION  
(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE  
LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):  
UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);  
CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)  
(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR  
(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

**RoHS Compliant**

TOLERANCES ARE

**All Connectors**

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION 



ORDER INFORMATION

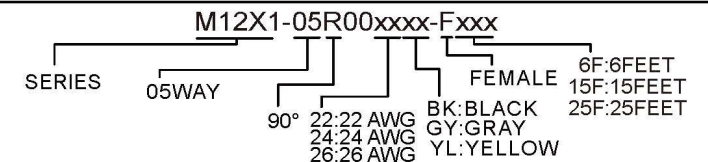

DESCRIPTION: M12-5PIN FEMALE TO OPEN (COLOR PVC JACKET)

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettnerstr. 25