


FRONT VIEW

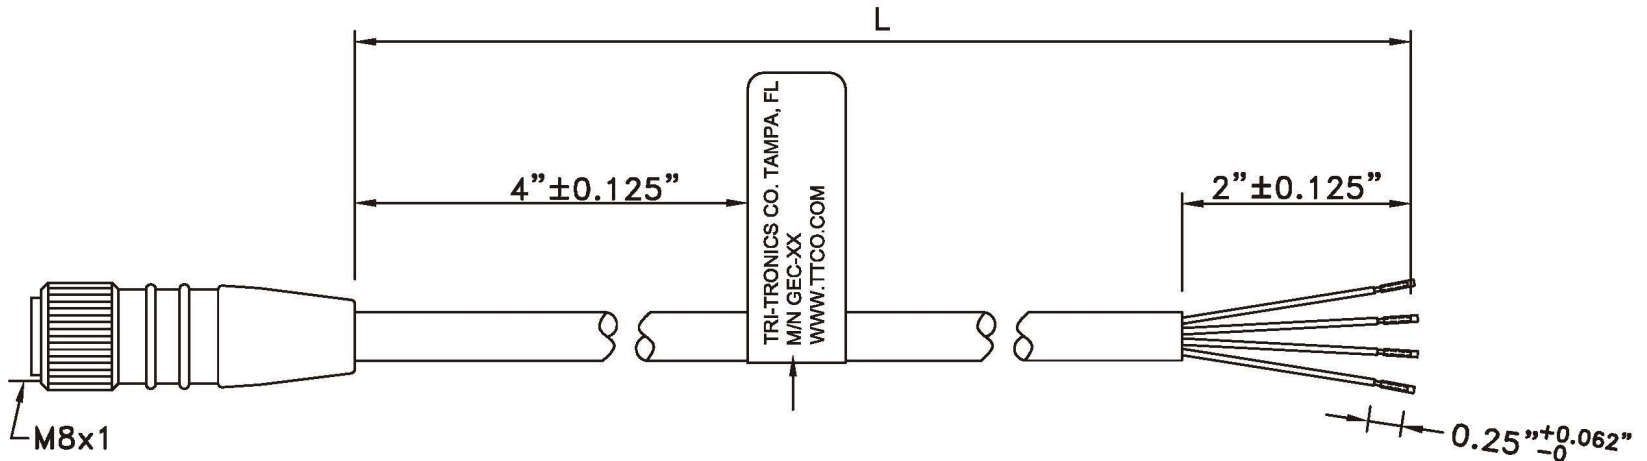

M8x1
M8-4PIN FEMALE
MOLDED PUR YELLOW

PIN OUT

M8-4PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC

(L=6'±2")
(L=15'±6")
(L=25'±1')

RoHS Compliant

TOLERANCES ARE

All Connectors

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PROJECTION

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

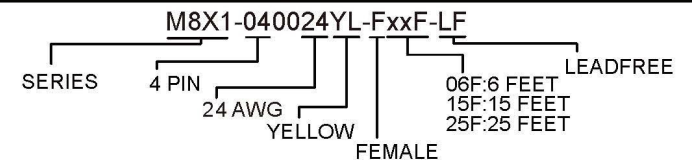

DESCRIPTION: M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

*****CONSTRUCTION:**

1.CABLE: * UL2464 (4C/24#)+TISSUE PAPER OD:4.4mm YELLOW PVC JACKET.

*****CONNECTORS:**

- 2.M8-4PIN: * M8-4PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M8x1 BRASS WITH NICKEL PLATED.
 * O-RING: SILICONE RUBBER RED COLOR.
 * MOLDED: PUR YELLOW COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GEC-XX WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 2A VOLTAGE RATING: 250V
- 6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE

Allconnectors

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE


SIZE A4

PPOJECTION 

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

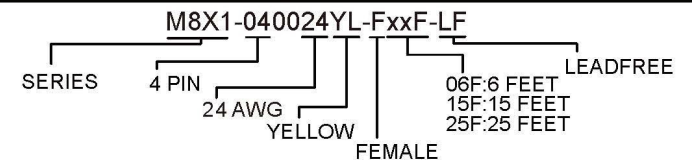

DESCRIPTION: M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25