



M8-4PIN FEMALE RIGHT-ANGLE TO OPEN (YELLOW PVC JACKET)

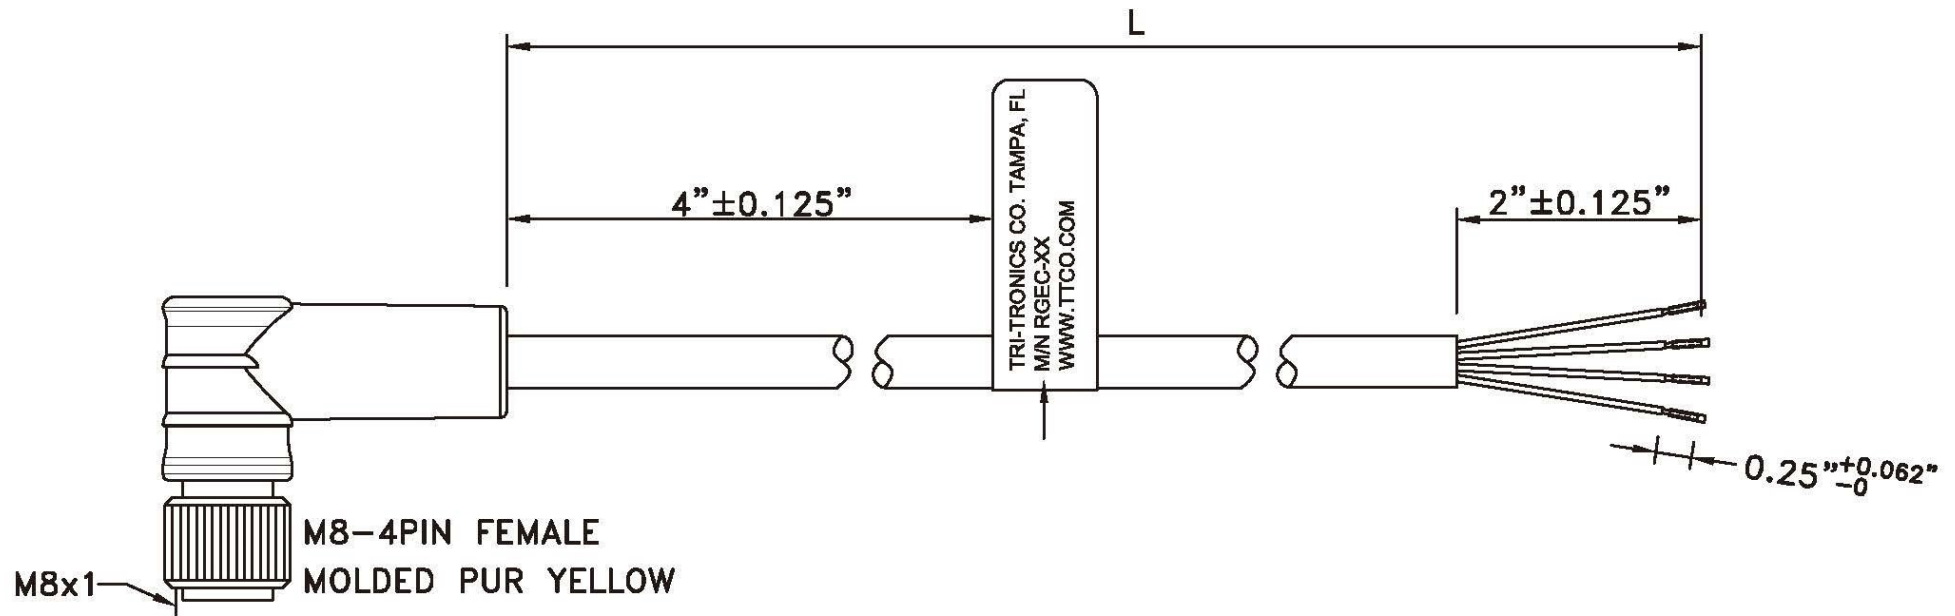

PIN OUT M8-4PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC

(L=6'±2")
(L=15'±6")
(L=25'±1")

RoHS Compliant

All Connectors


www.allconnectors.de
Tel.: 0049 711 7009503
A1/54 Hilderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 23

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

M8X1-04R0024YL-Fxxx-LF

SERIES | 90° | FEMALE | LEADFREE
4 PIN | YELLOW | 6F: 6 FEET
24 AWG | 15F: 15 FEET
25F: 25 FEET

DESCRIPTION:

M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)

***CONSTRUCTION:

1.CABLE: * UL2464 (4C/24#)+TISSUE PAPER OD:4.4mm YELLOW PVC JACKET.

***CONNECTORS:

2.M8-4PIN: * M8-4PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M8x1 BRASS WITH NICKEL PLATED.
 * O-RING: SILICONE RUBBER RED COLOR.
 * MOLDED: PUR YELLOW COLOR.

3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RGE-XX WWW.TTCCO.COM"

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: * CURRENT RATING: 2A VOLTAGE RATING: 250V

6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: * PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: * MATERIAL WITH RoHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

All Connectors


www.allconnectors.de info@allconnectors.de
 Tel: 0049 711 7009503 Fax: 0049 711 7009504
 20794 Filzerstadt - Germany Kettnerstr. 27

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION 

TOLERANCES ARE

X ±
 X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

M8X1-04R0024YL-Fxxx-LF
 SERIES | 90° | FEMALE | LEADFREE
 4 PIN | 24 AWG | YELLOW | 6F: 6 FEET
 15F: 15 FEET
 25F: 25 FEET

DESCRIPTION: