


REV.	Description	Date
1	part no. revise	2016/10/27

### Specification

1. Pitch=3.96mm
2. Current rating: 1A-7A
3. Volatge rating: 250V AC
4. Insulation resistance: 1000MΩ min.
5. Dielectric strength: AC 1500V / 1 minute

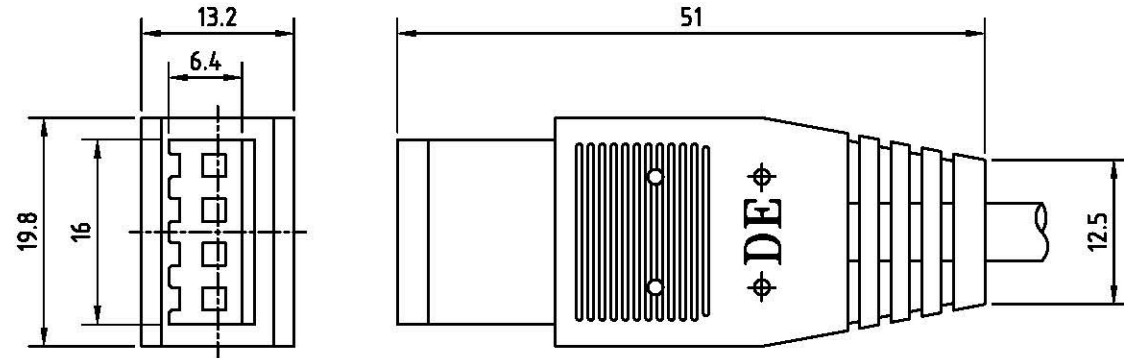

RoHS  
TOLERANCE X±0.5 X.X±0.3

**Allconnectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettenerstr. 25

ITEM	Housing Connector Molded Cable	DATE	2016/10/27	PART NO.	UT-D020-4P
		DWN	GINA	REV.	1
		CHK			
		UNIT	MM		