


REV.	Description	Date
1	part no. revise	2016/10/27

Specification

1. Pitch=3.96mm
2. Current rating: 1A-7A
3. Voltage rating: 250V AC
4. Insulation resistance: 1000MΩ min.
5. Dielectric strength: AC 1500V / 1 minute

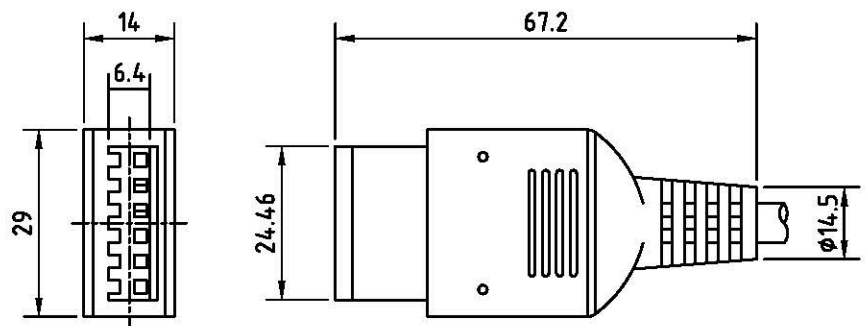

RoHS
TOLERANCE X±0.5 X.X±0.3

Allconnectors
 www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filnderstadt - Germany Kettenerstr. 25

DATE	2016/10/27	PART NO.	UT-D040-6P
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Housing Connector Molded Cable
------	--------------------------------