


## 2.00mm PITCH EJECTOR HEADER CONNECTOR, DOUBLE ROW RIGHT ANGLE, LONG LATCH, ROHS COMPLIANT

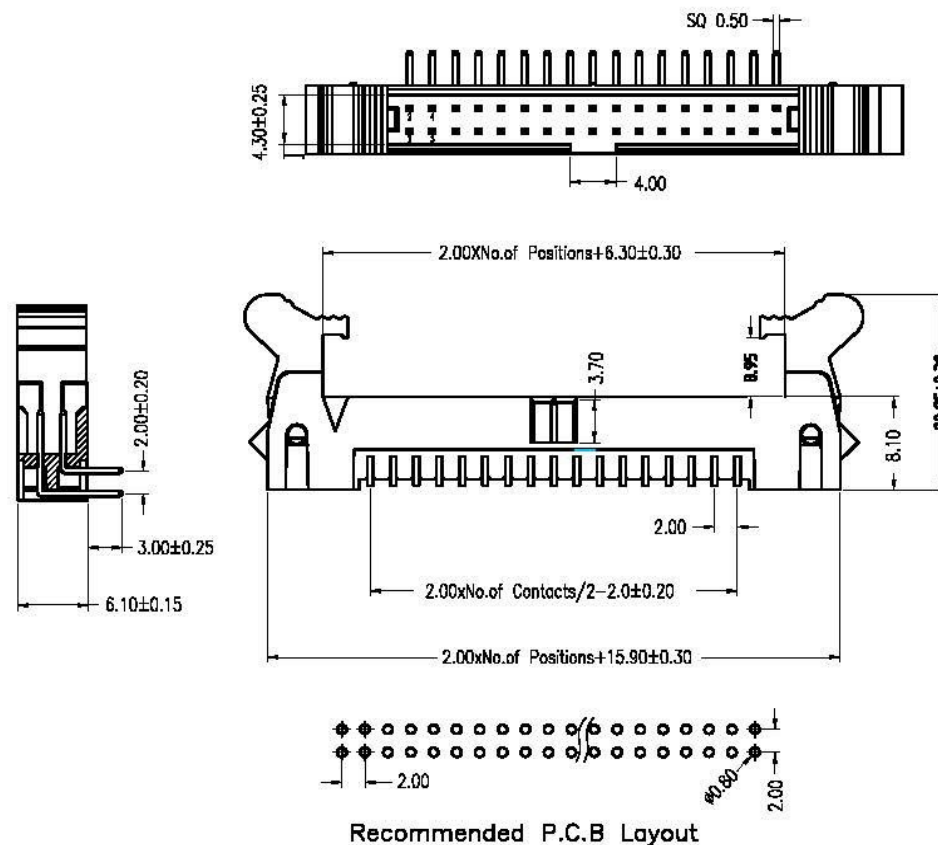

### Material Information:

Terminal: Brass  
 Insulator: PA6T+30%G. F, UL94V-0  
 Plating: Au or Sn plated over 50 U' Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 2.0A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

### Ordering Information

BERL - XX XX XX B1 X  
 ①            ②            ③

- ① No. of Contacts: 10 To 64
- ② Plating Option:  
 01: Gold Flash Over All  
 03: 3U' Gold Plated Over All  
 05: 5U' Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray B: PE Bag  
 C: Tube

|              |     |              |            |                |              |                 |
|--------------|-----|--------------|------------|----------------|--------------|-----------------|
| 绘图 (DRAWN)   | 孙高田 | 投影 (PROJECT) |            | 公差 (TOLERANCE) | 料号 (PART NO) | BERL-XXXXXXB1X  |
| 审核 (CHECKED) | 刘思晴 | 单位 (UNIT)    | MM         | 0.0 ± 0.30     | 品名 (NAME)    |                 |
| 核准 (APPROVE) |     | 比例 (SCALE)   | 1:1        | 0.00 ± 0.20    |              | 2.00间距牛角 长耳 90° |
|              |     | 版本 (EDITION) | A          |                |              |                 |
|              |     | 日期 (DATE)    | 2013/12/13 |                |              |                 |