
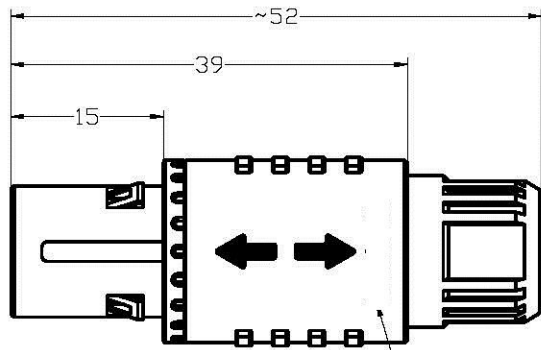



1 2 3 4 5 6 7 8

A
B
C
D
E



- NOTES :
- 1.MATERIAL
 OUTER SHELL : PSU/PEI
 INSULATOR : PEEK
 CONTACT : COPPER ALLOY
 CABLE COLLET : PSU/PEI
 NUT : PSU/PEI
 - 2.PLATING : Au ALL OVER Ni
 - 3.ALL DIMENSIONS ARE IN MILLIMETERS
 - 4.INGRESS PROTECTION : IP50
 - 5.ENDURANCE : 1000CYCLES
 - 6.WORKING TEMPERATURE : -50~150°C
 - 7.AVERAGE RETENTION FORCE FOR STRAIGHT PLUG PULL ON THE BACK NUT: 100N MIN.
 - 8.TORQUE : 0.5Nm MAX.
 - 9.RoHS DIRECTIVE COMPLIANCE

LOGO

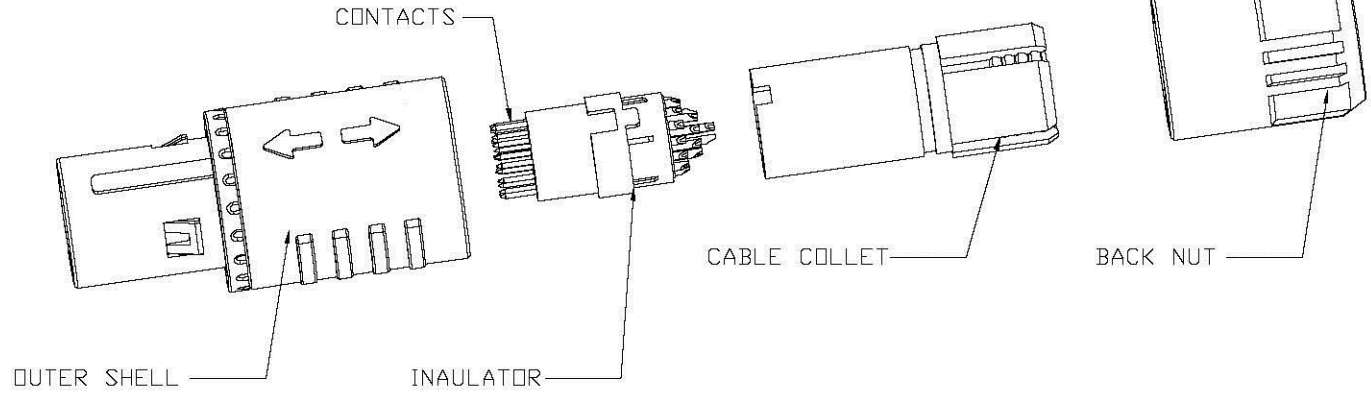

UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH		NAME: STRAIGHT PLUG			
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO: R-MM1XXPXXXXXXX		TITLE: CUSTOMER DWG.	
	mm	INCH	APPD: Seawen06/10/14	DWG NO: 010-0000-C42	
4 PLACE	± **.	± **.	CHKD: Annie06/10/14	C	
3 PLACE	± **.	± **.	DRAWN: Tommy06/10/14	SCALE: SHEET: REV:!	
2 PLACE	± 0.30	± **.		2/1	1/3
1 PLACE	± 0.50	± **.			X1
ANGULAR:	X° ± 5°	X° ± **.			

REV.	DESCRIPTION	DATE	APPD
X1	NEW RELEASE	06/10/14	Seawen

A1

D-PRD-034

1 2 3 4 5 6 7 8

A

B

C

D

E



A

B

C

D


E

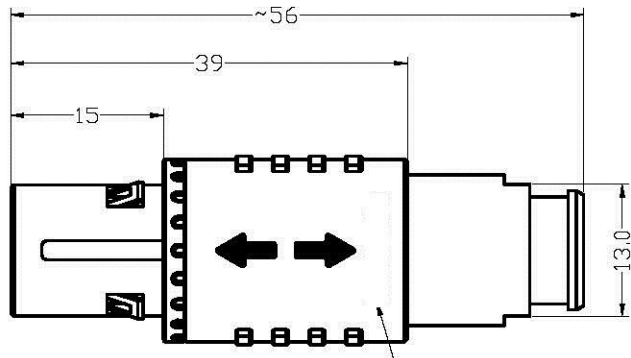

NOTES :

- 1.MATERIAL
 OUTER SHELL : PSU/PEI
 INSULATOR : PEEK
 CONTACT : COPPER ALLOY
 CABLE COLLET : PSU/PEI
 NUT : PSU/PEI
- 2.PLATING : Au ALL OVER Ni
- 3.ALL DIMENSIONS ARE IN MILLIMETERS
- 4.INGRESS PROTECTION : IP50
- 5.ENDURANCE : 1000CYCLES
- 6.WORKING TEMPERATURE : -50~150°C
- 7.AVERAGE RETENTION FORCE FOR STRAIGHT PLUG PULL ON THE BACK NUT: 100N MIN.
- 8.TORQUE : 0.5Nm MAX.
- 9.RoHS DIRECTIVE COMPLIANCE

LOGO

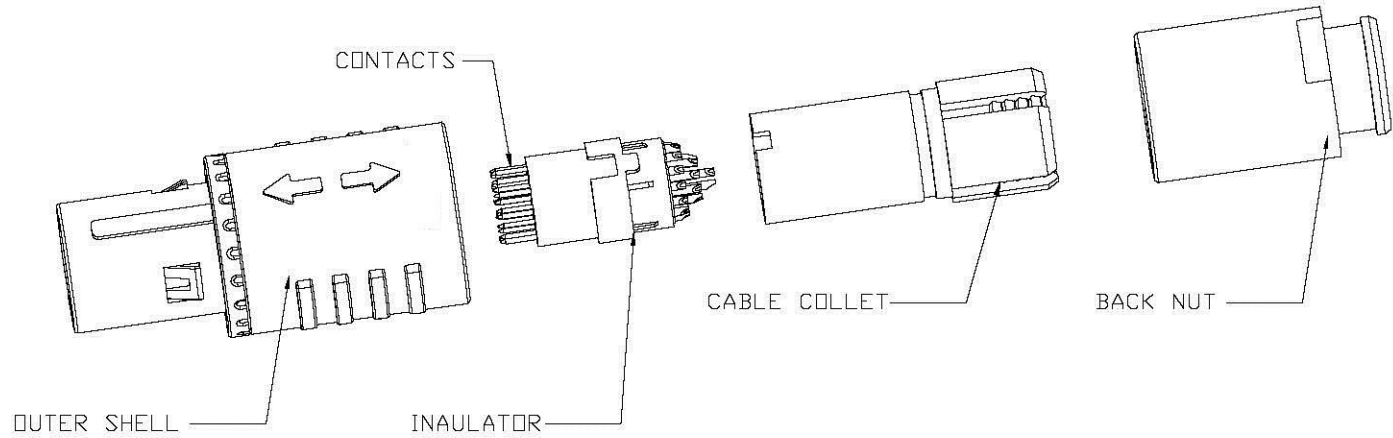

UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH		NAME: STRAIGHT PLUG			
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO: R-MM3XXPXXXXXX		TITLE: CUSTOMER DWG.	
	mm	INCH	APPD: Seawen06/10/14		DWG NO: 010-0000-C42
4 PLACE	± **.	± **.	CHKD: Annie06/10/14		C
3 PLACE	± **.	± **.	DRAWN: Tommy06/10/14		
2 PLACE	± 0.30	± **.	SCALE: 2/1		SHEET: 2/3
1 PLACE	± 0.50	± **.	REV: 1		
ANGULAR:	X° ± 5°	X° ± **			

X1	NEW RELEASE	06/10/14	Seawen
REV.	DESCRIPTION	DATE	APPD

A1

D-PRD-034

