



1.27mm(.050") Wire To Board Connector

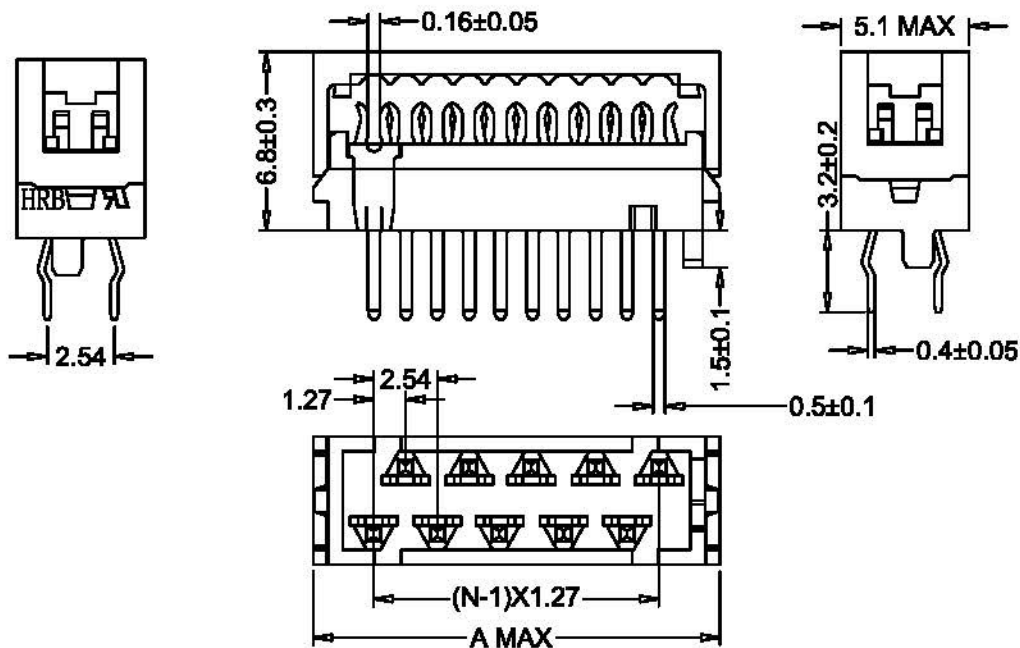

SPECIFICATIONS:

- Current Rating: 1A AC, DC
- Voltage Rating: 100V AC, DC
- Operating Temperature: -40°C ~ +105°C
- Contact Resistance: 10mΩ max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 500V AC/minute
- Wire size: AWG#28
- Paddle board connector
- MATERIAL
- Housing: PA46(red) UL94V-0
- Male Contact: Phosphor bronze
- Finish: Tin Over nickel plated



Ordering Information And Dimensions

Part NO.		Dimensions	Part NO.		Dimensions
TYP UL94V-0	Circuits	Dim:A MAX	TYP UL94V-0	Circuits	Dim:A MAX
M2548-2x2(P)	4	8.60	M2548-2x8(P)	16	23.80
M2548-2x3(P)	6	11.10	M2548-2x9(P)	18	26.30
M2548-2x4(P)	8	13.60	M2548-2x10(P)	20	28.90
M2548-2x5(P)	10	16.20	M2548-2x11(P)	22	31.40
M2548-2x6(P)	12	18.70	M2548-2x12(P)	24	34.00
M2548-2x7(P)	14	21.30			



www.allconnectors.de
Tel.: 0049 / 711 200563
40/94 Hildesheim, Germany

info@allconnectors.de
Fax: 0049 / 711 200564
Kettestraße, 25