


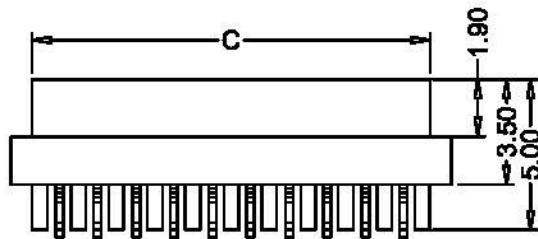
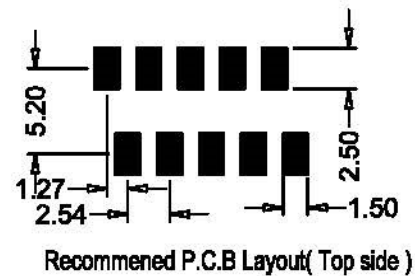


1.27mm(.050") Wire To Board Connector

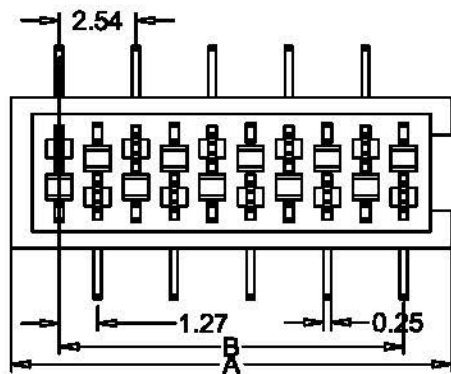

SPECIFICATIONS:

- Current Rating: 1A AC, DC
- Voltage Rating: 100V AC, DC
- Operating Temperature: -40°C ~ +105°C
- Contact Resistance: 10mΩ max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 500V AC/minute
- Wire Size: AWG#28
- SMT CONNECTOR
- MATERIAL
- Housing: PA46(red) UL94V-0
- Male Contact: Phosphor bronze
- Finish: Tin Over nickel plated

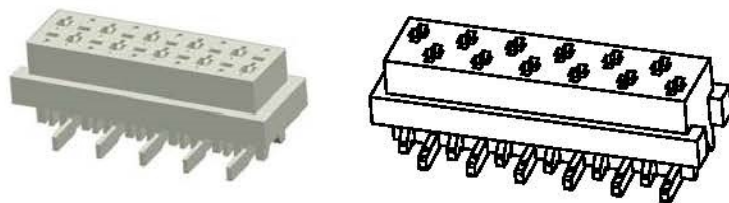

Ordering Information And Dimensions

Part NO.		Dimensions			Part NO.		Dimensions		
TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C
M25482-2x2	4	7.00	3.81	5.60	M25482-2x8	16	22.24	19.05	20.84
M25482-2x3	6	9.54	6.35	8.14	M25482-2x9	18	24.78	21.59	23.38
M25482-2x4	8	12.08	8.89	10.68	M25482-2x10	20	27.32	24.13	25.92
M25482-2x5	10	14.62	11.43	13.22	M25482-2x11	22	29.86	26.67	28.46
M25482-2x6	12	17.16	13.97	15.76	M25482-2x12	24	32.40	29.21	31.00
M25482-2x7	14	19.70	16.51	18.30					



www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
kettnerstr. 25