


REV.	ECN.	DATE	DWN	APVD

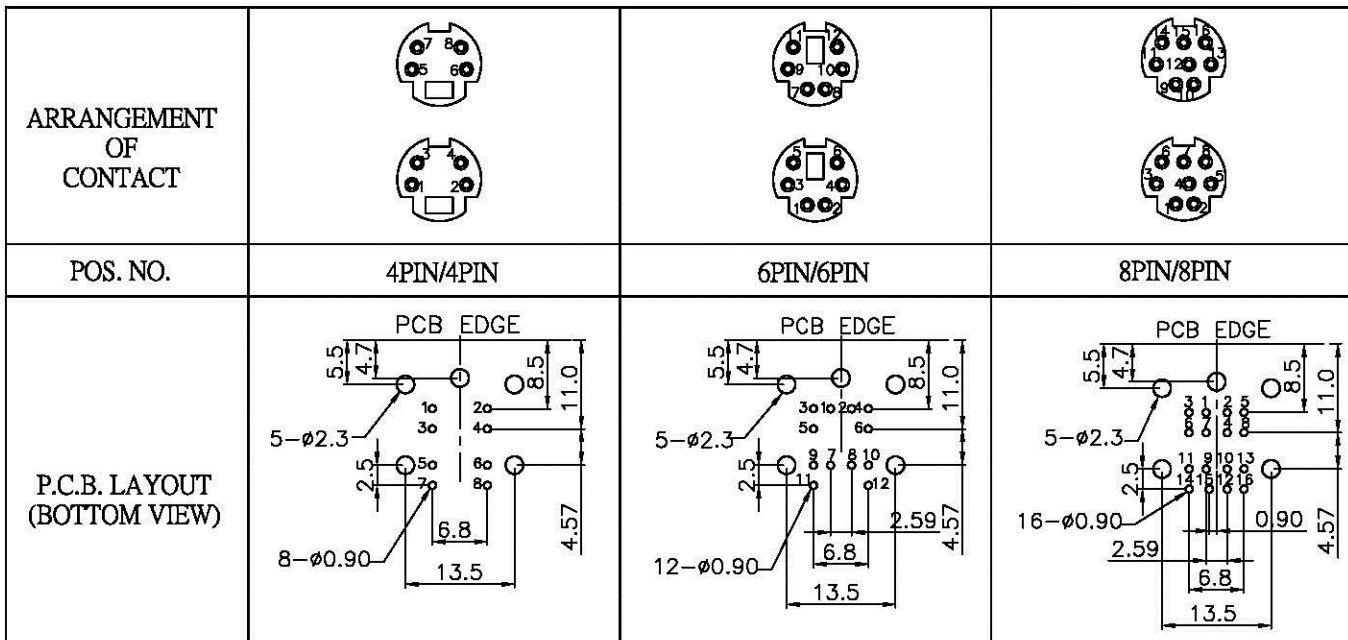

MATERIAL:


INSULATOR : PBT + GLASS FIBER(UL 94V-0)
 CONTACT : PHOSPHOR BRONZE
 CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
 WITH ENTIRE CONTACT NICKEL UNDERPLATED
 SHELL : STEEL, TIN LATED

SPECIFICATION:

RATED VOLTAGE AND CURRENT : 1A
 DIELECTRIC WITHSTANDING VOLTAGE : 250V AC AT SEA LEVEL
 INSULATION RESISTANCE : 100MQ MIN
 CONTACT RESISTANCE : 30mΩ MAX.
 TEMPERATURE RANGE : -40°C ~ +105°C

Order Information :

JM 9 6 - 4 4 2 1 1 B 2 1 3 - R
 1 2 3 4 5 6 7 8 9

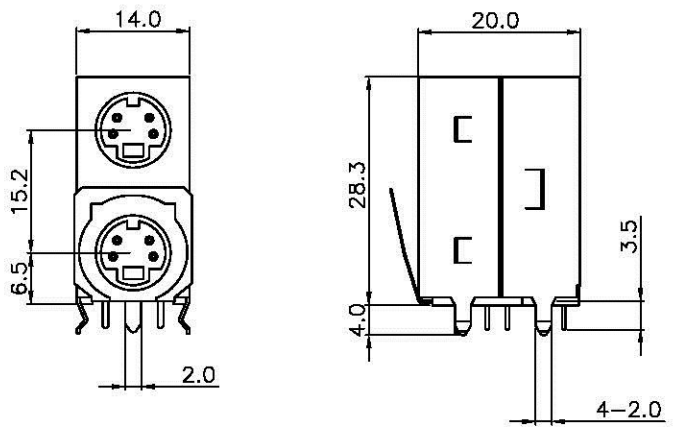

1. SERIES NUMBER	JM96 : MINI DIN RIGHT ANGLE STACK TYPE		
2. POSITION	44 : 4 / 4 46 : 4 / 6 48 : 4 / 8	64 : 6 / 4 66 : 6 / 6 68 : 6 / 8	84 : 8 / 4 86 : 8 / 6 88 : 8 / 8
3. CONTACT TYPE	2 : FEMALE		
4. CONTACT PLATING	1 : SELECTIVE GOLD FLASH 4 : SELECTIVE 15" GOLD 6 : SELECTIVE 30u" GOLD		
5. INSULATOR COLOR	1 : BLACK 9 : GREEN/PURPLE(PC99 COLOR)		
6. INSULATOR MATERIAL	B : PBT		
7. SHELL PLATING	2 : TIN		
8. SHELL OPTION	13 : FULLY SHIELDED & SPRING WITH KINK		
9. GREEN PRODUCT	BLANK : NOT GREEN PRODUCT R : RoHS		

Allconnectors
 www.allconnectors.de
 info@allconnectors.de
 Tel: 0049 7141 200950
 Fax: 0049 7141 200950
 Kertelmeistr. 25

SIZE	UNIT	SCALE	SHEET
A4	mm	1/1	1 OF 1

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

DRAWN.	JEAN	DATE	01 - 09 - 2006
CHECKED.	HENRY	DATE	01 - 09 - 2006
APPROVED.	HENRY	DATE	01 - 09 - 2006

DRAWING NO.	JM96-XX2XXXX13-R	C13008
TITLE.	MINI DIN RIGHT ANGLE STACK TYPE WITH SPRING	
PART NO.	JM96-XX2XXXX13-R	REV A.0