


REV.	ECN.	DATE	DWN	APVD

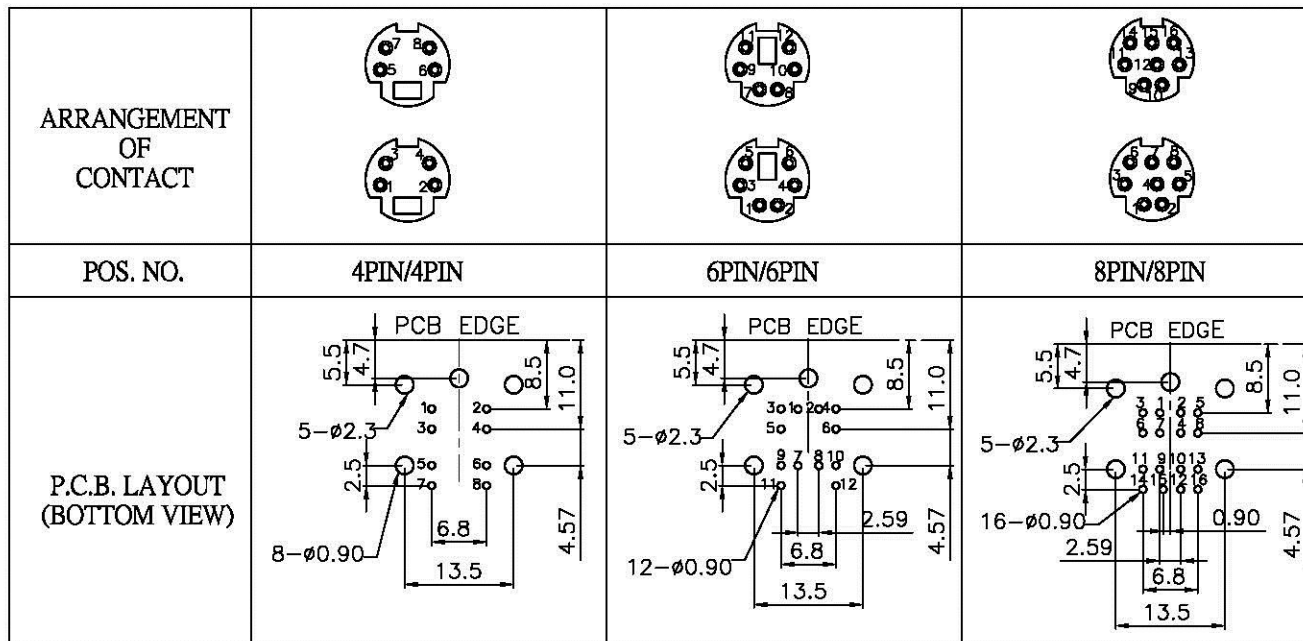

MATERIAL:


INSULATOR : PBT + GLASS FIBER(UL 94V-0)
 CONTACT : PHOSPHOR BRONZE
 CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
 WITH ENTIRE CONTACT NICKEL UNDERPLATED
 SHELL : STEEL, TIN LATED

SPECIFICATION:

RATED VOLTAGE AND CURRENT : 1A
 DIELECTRIC WITHSTANDING VOLTAGE : 250V AC AT SEA LEVEL
 INSULATION RESISTANCE : 100MΩ MIN
 CONTACT RESISTANCE : 30mΩ MAX.
 TEMPERATURE RANGE : -40°C ~ +105°C

Order Information :

JM 9 6 - 4 4 2 1 1 B 2 5 3 - R
 1 2 3 4 5 6 7 8 9

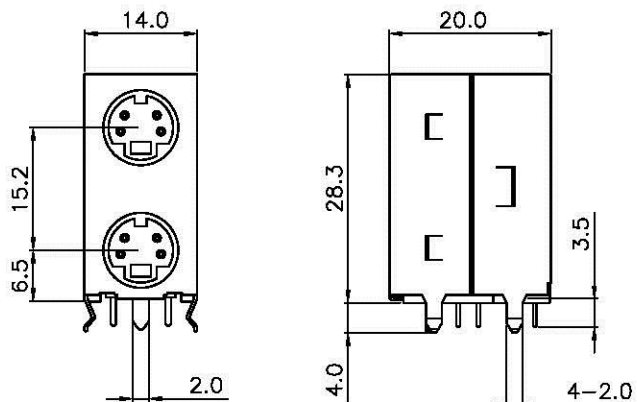

1. SERIES NUMBER	JM96 : MINI DIN RIGHT ANGLE STACK TYPE		
2. POSITION	44 : 4 / 4 46 : 4 / 6 48 : 4 / 8	64 : 6 / 4 66 : 6 / 6 68 : 6 / 8	84 : 8 / 4 86 : 8 / 6 88 : 8 / 8
3. CONTACT TYPE	2 : FEMALE		
4. CONTACT PLATING	1 : SELECTIVE GOLD FLASH 4 : SELECTIVE 15" GOLD 6 : SELECTIVE 30u" GOLD		
5. INSULATOR COLOR	1 : BLACK 9 : GREEN/PURPLE(PC99 COLOR)		
6. INSULATOR MATERIAL	B : PBT		
7. SHELL PLATING	2 : TIN		
8. SHELL OPTION	53 : FULLY SHIELDED WITH KINK		
9. GREEN PRODUCT	BLANK : NOT GREEN PRODUCT R : RoHS		