

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -55°C TO +105°C.

MECHANICAL CHARACTERISTICS:

CONTACT INSERTION FORCE: 6.0 KG MAXIMUM.
 CONTACT SEPARATION FORCE: 0.5KG MINIMUM.

MATERIALS:

CONTACT: BRASS.
 INSULATOR: P.B.T. UL 94-V0 RATED.
 SHELL: BRASS.

FINISHES:

CONTACTS: TIN FLASH.
 SHELL: TIN PLATED.

NO.OF CONTACT	3	4	5	6	7	8
PART NO.	MDC-SPBE-03	MDC-SPBE-04	MDC-SPBE-05	MDC-SPBE-06	MDC-SPBE-07	MDC-SPBE-08
POSTTION						

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/ mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

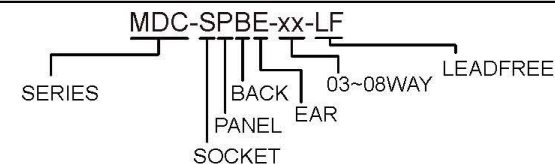

DESCRIPTION: